BRAND SYSTEM DOCUMENTATION · EDITION 0.1

CATHEDRAL TATTOO STUDIO

PREPARED BY

BlakSheep Creative

# COMPREHENSIVE BRAND KIT

Every token, rule, component, template, platform specification and prohibited claim in the Cathedral Tattoo Studio design system, collected in one document. A custom tattoo studio at 1318 Florida Ave SW, Denham Springs, Louisiana. Walk in, or book ahead.

**Draft by BlakSheep Creative, version 0.1, October 12, 2026. Not reviewed or approved by the studio.**

| CLIENT | PREPARED BY | SCOPE | ISSUED |
|---|---|---|---|
| Cathedral Tattoo Studio<br>Denham Springs, Louisiana | BlakSheep Creative<br>Denham Springs, LA | Identity, voice, tokens, 17 components, social system, deck and site | October 2026<br>Edition 0.1, draft |

ABOUT THIS DOCUMENT

# NO FLUFF. NO JARGON. JUST THE BRAND.

This kit is the complete record of the Cathedral Tattoo Studio design system as it stands in its first draft. Nothing has been summarized out: every colour value and its measured contrast, every type step, every spacing token, all seventeen components, the full social architecture, every platform canvas, the prohibited-claims register, and every open question still blocking publication.

It exists so that anything made for Cathedral, a page, a post, a card, a slide, looks and sounds like the studio: a black field, a little gold, one real tattoo given all the room, the name of the artist who made it, and a plain sentence that is true.

**Who made it.** BlakSheep Creative, a digital marketing and brand studio in Denham Springs, Louisiana, a few minutes from the studio. We built this system from the studio's own logo artwork, its photographs of real work, its Google Business Profile, its reviews, and a records check on every public claim.

**How to use it.** Sections 1 to 7 are the brand law. Section 8 is the component contract. Sections 9 and 10 are the social and template systems. Section 11 is the token source, reproduced verbatim so this document can rebuild the system if every other file is lost.

BlakSheep Creative · Denham Springs, LA

## CONTENTS


| | | |
|---|---|---|
| 01 | Context: the studio, the work, audience, position | BRAND LAW |
| 02 | Content fundamentals: voice, casing, vocabulary | BRAND LAW |
| 03 | Visual foundations: colour, type, space, motion, layout | BRAND LAW |
| 04 | Iconography | BRAND LAW |
| 05 | Assets and logo rules | BRAND LAW |
| 06 | Photography and consent | BRAND LAW |
| 07 | Prohibited claims: overrides everything else | BRAND LAW |
| 08 | Components: all seventeen, rendered | CONTRACT |
| 09 | Social, video and data content system | CONTRACT |
| 10 | Deck and website templates | CONTRACT |
| 11 | Token appendix: verbatim source | SOURCE |
| 12 | File index | SOURCE |
| 13 | Open questions: ask before finalizing | BLOCKERS |


READ SECTION 7 FIRST IF YOU ARE SHIPPING TODAY

The prohibited-claims register overrides every other page in this document, including anything in it that looks like a good idea. And nothing in this kit has been approved by anyone at the studio: every unapproved item stays visibly marked CONFIRM BEFORE PUBLISHING.

SECTION 01

# THE CONTEXT

Who the studio is, what it actually does, who it is for, and where it sits in a crowded local field.

## STUDIO OF RECORD

| | |
|---|---|
| STUDIO | Cathedral Tattoo Studio. Second reference: Cathedral. Never "CTS" in text |
| WHAT IT IS | A custom tattoo studio in Denham Springs, Louisiana |
| ADDRESS | 1318 Florida Ave SW, Denham Springs, LA 70726. The only address in any output |
| PHONE | (225) 301-9527, always "Call or text", linked tel:+12253019527 |
| HOURS | Monday to Thursday 10am to 6pm · Friday and Saturday 10am to 7pm · Closed Sunday |
| BOOKING | Walk-ins and booked work: "Walk in, or book ahead." |
| WEBSITE | None. No domain is registered. No URL appears anywhere |
| INSTAGRAM | @cathedral_tattoostudio (studio, with the underscore) · @rc_tattoos (Roger Cazares, his own) |
| GOOGLE | 5.0 on Google from 6 reviews (October 11, 2026). Always dated |
| MARKET | Denham Springs. "Denham Springs and the Baton Rouge area" is the only wider wording |

## WHAT THE NAME MEANS

A cathedral mark over work that carries weight, in a room with the door open. The name and the gothic lockup are the studio's own. The mark is severe; the words beside it are not. The legal entity was registered in May 2026, and no tenure, founding story or ownership line is ever written.

## THE WORK

**Black and grey**
The largest share of the work on file.

**Fine line and dotwork**
Single-needle fine line and stippled dotwork.

**Lettering and script**
Words carried as work, never quoted as copy.

**Color**
Kept as tattooed, never tinted.

**Cover-ups**
An honest answer about what will work. No guarantee.

**Memorial and portrait**
Shown plainly. Never sold with grief language.

**Large-scale**
Sleeves and back pieces, planned across sittings.

The list is closed: seven names, no eighth. Never "all styles". Religious subjects are tattooed and captioned like any other piece and are never a category. All seven are evidenced by one artist, Roger Cazares.

## WHO IT IS FOR

### The person with one piece that has to be right

Has carried the idea for months: a memorial portrait, a sleeve, a cover-up. Researches heavily and chooses a person, not a shop. Inferred from the photographs; a working hypothesis.

### The first-timer or nervous client

Choosing on whether the room feels easy. Wants to know what happens and that nobody will hurry them. Evidenced: the studio's own Google reviews say this in customers' words.

| CUSTOMER | CARES MOST ABOUT | LEAD WITH | AVOID |
|---|---|---|---|
| **Memorial or portrait** | Likeness, and not being rushed | Portrait work shown large; the clearest photo to bring | Selling grief back. Any before and after |
| **Large-scale project** | Cohesion across sittings | Sleeves and back pieces; planned across sittings CONFIRM BEFORE PUBLISHING | Any price, rate or hour count |
| **Cover-up** | Whether it can be done at all | An honest answer: some can, some cannot | A guarantee. Mocking the old tattoo |
| **First-timer** | Not feeling rushed or judged | One plain sentence, and a customer's words | Reassurance clichés. Any hygiene claim |

## POSITION: CONSIDERED WORK, AND A ROOM THAT IS EASY TO WALK INTO

Denham Springs is crowded: three tattoo shops sit on the same street within a mile, and almost every shop in the area makes the same three claims (clean, experienced, custom) over a dark page with a wall of thumbnails. Cathedral is described only by what it does, never against anyone. What it does that the field does not: shows fewer pieces, larger, credited by name; speaks to the nervous client; publishes open dates; and wears gold on black, the most distinct colour choice in the area and the logo's own.

OPEN DECISION B-05: PREMIUM, HELD OR RELEASED

The agency positioned the studio as premium in September. The live shop takes walk-ins six days a week and has no minimum. Clint Sanchez has not ruled. Everything in this kit is written to be true either way: commissioned work leads, walk-ins are stated as a plain fact, and any premium position is shown through restraint and never claimed in words.

## SURFACES REPRESENTED IN THIS SYSTEM

| SURFACE | WHERE IT LIVES |
|---|---|
| **Website (no domain yet)** | `Header, hero, work, what to expect, hours, footer, mobile action bar: §8 and §10` |
| **Presentation deck** | `Six 16:9 slide masters: §10` |

| SURFACE | WHERE IT LIVES |
|---|---|
| **Social, video and covers** | Feed, story, Google post, carousel, reel covers, banners, avatars: §9 |
| **Design system** | The Cathedral Tattoo Studio design system artifact: tokens, brand book, 38 component and template cards |

## SOURCES THIS SYSTEM WAS BUILT FROM

- **GitHub:** clintsanchez/cathedral-tattoo-studio, the `design-kit/` folder at commit 9715d78: the master prompt, brand guidelines, visual identity, voice, messaging, brand context, asset manifest and the social template prompt.
- **Logo artwork:** the studio's own gold gothic lockup, raster only, and the digital set cut from it on 2026-09-05. Nothing redrawn.
- **Photographs:** 29 photographs of finished work by Roger Cazares, each checked for the manifest on 2026-10-12. 60 more candidates were rejected.
- **Public record:** the Google Business Profile (read in full 2026-10-11), Facebook, Instagram, the Louisiana Secretary of State filing and six Google reviews.

**STATUS**

Nobody at the studio has been interviewed for this kit, and nobody there has seen it. The name, the logo, gold on black, the photographs and how the shop runs are the studio's own. The position, tagline, voice, colour roles, typefaces and every template are BlakSheep Creative proposals.

SECTION 02

# THE VOICE

A skilled tradesperson talking across a counter. Plain, warm and unhurried. The mark is gothic; the words are not.

## A CRAFTSMAN WITH STEADY HANDS

Cathedral sounds like someone who takes the work seriously and performs nothing. It says what a piece will take, answers the question that was asked, and never oversells, because the photographs are doing that job already. When the subject is heavy, a memorial, a name, a face, it does not get poetic. It gets careful. It tells a nervous person what will happen and that they can ask anything. Praise comes from customers, in their words, with their names on it.

### Three rules

- **The mark is gothic. The voice is not.** Let the logo be dramatic so the writing does not have to be.
- **Show the weight, never claim it.** No premium word, no superlative.
- **Name the artist.** Every piece credited, by name, every time.

### The test for any sentence

Could any tattoo shop say it? Then cut it or make it specific. Would it sound right said out loud across a counter, to one person? If it sounds like a brochure or a sermon, rewrite it.

## EIGHT TRAITS

| TRAIT | DO | DON'T |
|---|---|---|
| **Plain** | "It'll take about three sittings." CONFIRM BEFORE PUBLISHING | "Your journey will unfold across a series of sessions." |
| **Specific** | "Black and grey portraits, religious pieces, fine line and dotwork." | "All styles welcome." |
| **Careful** | "Bring the clearest photo you have of her. Face-on is best." | "We'll transform your grief into something beautiful." |
| **Honest about limits** | "That's a cover-up, and it'll need to be bigger and darker than what's there." | "Anything is possible." |
| **Unhurried** | "Think about it. The dates will still be there tomorrow." | "Book now, spots going fast!" |
| **Selective** | "Large pieces get planned across sittings, so they get the time they need." | "I take a limited number of large pieces." Nobody has said so |
| **At ease** | "First one? Tell us. We'll walk you through it before anything starts." | "Our friendly team will make you feel right at home!" |
| **Attributive** | "Sleeve by Roger Cazares." | "Another one from the Cathedral team." |

## HEADLINES AND CALLS TO ACTION

### Headlines say what happens

- "First time, or nervous about it"

### Three calls to action, and no others

- **See the work** (primary)

- "Bigger and darker"
- "What to bring for a portrait"
- "Looking after it"
- "Planned, not improvised"

- **Call or text (225) 301-9527** (secondary, the phone is always a button)
- **Check open dates** (only where real dates are shown)

Never "Book now", "Get inked", "Book online", "Learn more", "DM to book".

## MECHANICS

- Sentence case everywhere, headlines included. The only capitals are the ones the heading typeface sets by style.
- "You" for one reader; "we" for the studio, sparingly; "I" only inside an artist's own caption or quote.
- Contractions always. Short sentences; shorter when the subject is heavy. Paragraphs of four lines at most.
- No exclamation marks, no ellipses, no emoji, no dashes as punctuation. Ranges are written "10am to 6pm" and "3 to 4 sittings".
- Public copy is American English ("color"), except "black and grey", which is how the trade writes it.
- Numerals for hours, dates and sittings. The phone is always "(225) 301-9527".

## VOCABULARY

| USE | NEVER |
|---|---|
| **Tattoo, piece, work** | "Ink" as a noun, "inked", "tat", "body art" |
| **Sitting, session** | An hour count |
| **Walk in, or book ahead.** | "By appointment", "appointment only", "booking required" |
| **Open dates** | "Limited availability", "spots going fast", a count of spaces |
| **Tattoo artist at Cathedral Tattoo Studio** | "Owner", "founder", "our team", "our talented artists" |
| **Healed, cover-up, placement, stencil, touch-up** | "Parlor", "bring your vision to life", "journey", "transform" |
| **Denham Springs; Denham Springs and the Baton Rouge area** | Any other town, a radius or a drive time |

## ON BRAND, OFF BRAND

ON BRAND

Thinking about a cover-up? Send a clear photo of what's there. We'll tell you what it'll take, and what won't work. Call or text (225) 301-9527.

OFF BRAND

~~Premier custom tattoo parlor! Our award-winning team brings your vision to life. Walk-ins welcome, book now before spots fill up!~~

The off-brand line breaks the register six times: premier, parlor, award-winning, team, "bring your vision to life", manufactured urgency, and two exclamation marks.

## REVIEWS AND REPLIES

Six Google reviews exist and every one has a reply. A reply thanks the customer by first name, responds to one specific thing they said, names the artist where the customer did, and stops at two or three sentences. No template, no sales line, no emoji, no exclamation mark. Nothing is ever offered in exchange for a review.

SECTION 03

# VISUAL FOUNDATIONS

Black is the field. Gold is gilding, and there is little of it. With eyes half shut, a page reads as black with one thin line of gold and one photograph.

## THE MARK SETS THE IDIOM

The logo is a vertical lockup in gold on black: a gothic cathedral facade with pinnacles and a cross at the apex, a rose window of eight foiled openings under a pointed arch, "Cathedral" in gold blackletter across the full width, and "Tattoo Studio" on a ruled line beneath. The gold is a metallic gradient, not a flat colour. The artwork is about 83 per cent black and 12.5 per cent gold, and that ratio sets the layout proportions for everything else.




OFFSET THE SEVERITY OF THE MARK, NEVER SOFTEN IT

Customers describe the place as welcoming and comfortable for someone anxious. A black and gold blackletter identity says none of that. So the logo stays exactly as it is, and warmth is put beside it: warm directional light, faces, the room, generous space, sentence-case type.

## COLOUR: BRAND

One hue family, warm gold, over a near-black ground. The values are interim: stops read off a JPEG of the logo's metallic gradient on 2026-09-04, not authored colours. Contrast ratios are measured against Ground, Surface and Elevated.

**GOLD**
#B99040
6.72 on Ground, AA. Primary button fill, links, labels, the hairline.

**GOLD BRIGHT**
#EBC853
12.18 on Ground, AAA. Hover, focus ring, one small emphasis.

**GOLD DEEP**
#825F2C
3.42 on Ground. Borders and 24px+ text only. Fails on Elevated.

**WARNING**
#E8A33D
9.18 on Ground. The confirm badge and form warnings only.

# COLOUR: NEUTRALS AND STATUS

**GROUND**
#0A0A0A
The field. About 70 per cent of any view.

**SURFACE**
#141414
Cards, panels, fields. 1.07 from Ground: always keylined.

**ELEVATED**
#1E1C19
The one raised panel in a view. Warm-shifted.

**TEXT**
#E8E4DC
15.61 on Ground, AAA. Headings and body.

**TEXT MUTED**
#A9A29A
7.85 on Ground, AAA. Captions, credits, hints.

**BORDER**
`rgba(185,144,64,.18)`
Gold at 18 per cent. Decoration only, 1.26.

**SUCCESS**
#22A06B
5.95 on Ground. Form confirmation only.

**ERROR**
#D9534F
5.00 on Ground. Form errors; 4.29 on Elevated.

# SEMANTIC ASSIGNMENT

| ROLE | TOKEN | VALUE | NOTE |
|---|---|---|---|
| **Page ground** | `--cts-bg-base` | #0A0A0A | Every page, slide and graphic |
| **Card and field** | `--cts-bg-surface` | #141414 | Always with the 1px border |
| **Raised panel** | `--cts-bg-elevated` | #1E1C19 | One per view: a quote, a notice |
| **Heading and body** | `--cts-text-primary` | #E8E4DC | Never on a gold fill (2.32) |
| **Caption and credit** | `--cts-text-muted` | #A9A29A | Also the form field border |
| **Primary action** | `--cts-primary` | #B99040 | Ground label on it, 6.72 |
| **Hover and focus** | `--cts-gold-bright` | #EBC853 | 3px ring, 2px offset, always visible |
| **Divider** | `--cts-border-subtle` | gold 18% | Never the only edge of a field |
| **Status** | `--cts-success / warning / error` | #22A06B · #E8A33D · #D9534F | Form UI only, always with a word and an icon |

# THE RATIO: BLACK IS THE FIELD




Ground, Surface and Elevated together make about 83 per cent of a view, the same share as in the logo. Gold, the logo included, is 12 to 15 per cent at most; outside the logo, 3 to 5. Two gold elements competing in one view means one of them is wrong.

**HARD COLOUR LIMITS**

No light section, panel, card, slide or page, ever: gold on white is 2.95 and fails, and the logo has no light-ground version. No gradient, glow, metallic or foil effect outside the logo artwork. No second accent hue and no red. Colour is never the only signal: links are underlined, errors carry words and an icon, the current nav item carries a hairline.

TYPE

# CINZEL

Cinzel 600 for the hero, H1 and H2 only. Drawn from Roman inscriptional capitals, it carries the weight of the building without imitating the blackletter. Capitals by style, letterspaced, six words a line at most, never below 26px.

# Source Sans 3

Source Sans 3 at 400 and 600 for everything else: H3 and below, body, labels, buttons, captions and every quotation. A humanist sans that stays readable in light type on black.

| ROLE | TOKEN | FACE | DESKTOP | MOBILE | LEADING | USE |
|---|---|---|---|---|---|---|
| **Display** | `--cts-text-display` | Cinzel 600 | 56 | 40 | 1.15 | Homepage hero only |
| **H1** | `--cts-text-h1` | Cinzel 600 | 44 | 32 | 1.15 | Page title |
| **H2** | `--cts-text-h2` | Cinzel 600 | 34 | 26 | 1.15 | Section headings |
| **H3** | `--cts-text-h3` | Source Sans 3 600 | 24 | 24 | 1.25 | Card titles, artist name |
| **H4** | proposal | Source Sans 3 600 | 20 | 20 | 1.3 | FAQ questions |
| **Lead** | proposal | Source Sans 3 400 | 21 | 20 | 1.5 | One intro paragraph, a review |
| **Body** | `--cts-text-base` | Source Sans 3 400 | 18 | 18 | 1.6 | Paragraphs |
| **Small** | `--cts-text-small` | Source Sans 3 400 | 14 | 14 | 1.5 | Captions, credits |
| **Label** | proposal | Source Sans 3 600 | 14 | 14 | 1.3 | Eyebrows, capitals 0.08em |
| **Button** | proposal | Source Sans 3 600 | 17 | 17 | 1 | Buttons |

**BLACKLETTER IS NEVER LIVE TYPE**

The face in the logo is unidentified and exists only inside the logo image. No headline, quote, numeral or graphic is set in blackletter, Old English, Fraktur, tattoo script, brush, grunge, slab or geometric type. One ornate voice, and it is the logo. Both faces are Google Fonts under the SIL Open Font Licence; no font files were supplied.

## BACKGROUNDS AND PHOTOGRAPHY ON THE PAGE

### Always

- Ground #0A0A0A for every page, slide and graphic
- Surface and Elevated only as panels inside a layout
- Pure black only as a panel behind an opaque logo file
- Photographs beside or beneath text, square-cornered

### Never

- A gradient, pattern or texture: no stone, marble, gold leaf, grain or smoke
- A photograph behind text, full bleed or darkened as a ground
- The rose window, cross or tracery enlarged, ghosted or tiled
- A scrim, vignette or tint

# SHAPE, BORDERS, SHADOWS

| TOKEN | VALUE | APPLIES TO |
|---|---|---|
| **`--cts-radius-sm`** | 6px | Buttons, inputs, the confirm badge |
| **`--cts-radius-md`** | 12px | Cards and panels that hold text |
| **`--cts-radius-lg`** | 20px | A modal or menu sheet only |
| **Photographs** | 0 | Every photo, everywhere. No pills, no circles |
| **Hairline** | 1px gold 18% | Card edges, dividers, hours rows. Decoration only |
| **Gold hairline** | 1px #B99040, 64px | The one signature rule in a view |
| **Field border** | 1px #A9A29A | Every input; 2px #D9534F in error |
| **Shadow** | none | A shadow cannot be seen on black; a glow is the wrong register |

# LAYOUT

| TOKEN | VALUE |
|---|---|
| **`--cts-space-1 … 6`** | 8 · 16 · 32 · 64 · 96 · 128px (8px base, nothing between) |
| **`--cts-container`** | 1200px content maximum; 640px text column |
| **Columns** | 4 mobile · 8 tablet · 12 desktop |
| **Gutter** | 16px mobile and tablet · 32px desktop |
| **Section padding** | 64px mobile · 96px desktop · 128px around the hero and the one large photo |
| **Tap target** | 44px minimum, 8px between neighbours |

- **Fewer pieces, larger.** One feature photograph per view where possible, sets of four at most, twelve per page at most.
- **Nothing sits on a photograph.** No headline, caption, button, logo or scrim. The caption sits beneath.
- **Every photo on file is portrait.** Slots are 4:5, 3:4 or 1:1. No 16:9 hero, no wide banner photo.
- **The logo appears once per view** and never follows the reader down the page.

# MOTION

| ITEM | VALUE |
|---|---|
| **Transition** | 150 to 200ms, ease-out, colour or border only |
| **Hover** | Primary to gold bright; secondary to gold at 10 per cent; links to gold bright; card border to gold |
| **Press** | The hover state, held. No scale, no bounce |
| **Focus** | The 3px ring appears at once |
| **Reduced motion** | Every transition removed under prefers-reduced-motion |

| ITEM | VALUE |
|---|---|
| **Never** | Parallax, scroll reveals, autoplay, carousels that move, shimmer on gold, image zoom, counters, an animated logo |

SECTION 04

# ICONOGRAPHY

Icons are functional, not branded. The logo carries the personality. No icon set is chosen yet.

## THE SYSTEM

Proposed: a line set with square ends and mitred joins, Tabler Icons or Lucide configured that way, both under open licences. No icon files are bundled in this kit. Record the set and its licence when it is chosen. The few icons drawn in the component specimens (plus, info, error, image) are placeholders to that style.

| PROPERTY | RULE |
|---|---|
| **Stroke** | 1.5 to 2px on a 24px grid; scale the stroke with the size. Thin lines disappear on black |
| **Corners** | Sharp. No rounded ends or joins |
| **Fill** | Line only. No fill, no two-tone, no icon inside a circle or shield |
| **Size** | 24px beside text · 20px in a button · 32px in a step list · 48px at most on a page |
| **Colour** | Gold or Text, one colour per view. Gold deep only at 24px+ on Ground or Surface |
| **Label** | Every icon has a text label. The phone icon never stands in for the number |
| **Emoji and symbols** | None |

## ICONS NEEDED

| GROUP | ICONS |
|---|---|
| **Contact** | phone, message, clock, map pin, external link |
| **Navigation** | menu, close, chevron down, arrow right, arrow left |
| **Content** | plus and minus (FAQ), image and camera (photo slot), calendar (open dates) |
| **State** | alert circle (error), check (sent), info |
| **Social** | Instagram, Facebook and Google marks, one colour, 24px, as links only |

NEVER AS AN ICON

A tattoo machine, a needle, a drop of ink, a skull, a rose, a dagger, a cross, a church, a pointed arch, a quatrefoil, a halo, praying hands, a star for the rating, or any gothic ornament as interface furniture. One ecclesiastical voice in the brand, and it is the logo.

SECTION 05

# THE ASSETS

Use the supplied artwork only. Never redraw, trace, vectorise, recolour, re-letter, crop into, add effects to, or AI-recreate any part of it.

## THE RASTER DECISION

Decided by Clint Sanchez, BlakSheep Creative, on 2026-09-05: the logo ships as the existing raster, with no redraw. There is no vector and none is coming; auto-tracing was tested on paper and rejected. The name is never set in live type as a substitute for the logo. Only the supplied files are composited, unchanged. No print-ready, spot-colour, foil, embroidery or signage artwork exists.

## ASSET INVENTORY




### PRIMARY LOCKUP

`lockup-1200-alpha-DARK-BACKGROUNDS-ONLY.png`

1200 × 1499 with transparency. The default on Ground, Surface and Elevated. 128px wide minimum.




### OPAQUE LOCKUP

`lockup-1200.png` · `lockup-600.png`

On pure #000000 only. On #0A0A0A its edge can show: use the alpha file.



### THE AVATAR

`avatar-rose-512.png`

The rose window, cut from the lockup. Every profile picture at 64px and larger.



### THE SMALL MARK

`avatar-cross-512.png`

The cross from the apex. 16 to 63px, favicons, the inner-page header.

## SMALL MARKS AND FAVICONS



Rose · 64px



Cross · 48



favicon-32



favicon-16



touch 180

Below its floor the mark changes; it does not shrink. 128px wide and larger: the full lockup. 64 to 127px in an avatar slot: the rose window. 16 to 63px: the cross. Never the lockup squeezed into a circle.

# READY-MADE COMPOSITIONS




OG-CARD-1200X630.PNG

Link preview. Used as it is.




SOCIAL-SQUARE-1200.PNG

Square posts and closers. 384px+.




COVER, 1920 × 1080

Artwork in the middle 31 per cent.

# CLEAR SPACE AND MINIMUM SIZE

| LOCKUP WIDTH | HEIGHT | CLEAR SPACE |
|---|---|---|
| **128px (minimum on screen)** | 160px | 13px |
| **200px** | 250px | 20px |
| **320px (website hero)** | 400px | 32px |
| **600px** | 749px | 60px |

Clear space is the height of the cross finial on every side, about 8 per cent of the lockup's height. At 128px the wordmark is legible; at 64px "Cathedral" is mush; at 32px the lockup is a gold smear. Never scale below the floor and hope. Never upscale past 1200px.

### Approved grounds

- #0A0A0A: the alpha lockup, the rose, the cross
- #141414 and #1E1C19: the alpha lockup at 200px+
- Pure #000000: the opaque files and the cover
- A dark, even, detail-free area of a photo that is not a tattoo. None is on file

### Never

- On white, cream, light grey or a light photo
- Recoloured: not white, not flat gold, not a token gold
- A shadow, glow, bevel, stroke, gradient, shine or animation
- Stretched, rotated, mirrored, cropped into, or "Cathedral" alone
- More than once in a view, as a watermark, or in a sticky header
- The RC monogram or the CTS badge as a logo

THE RC MONOGRAM AND THE CTS BADGE

The RC monogram is Roger Cazares's signature on his own photographs and nothing else: never a logo, avatar, favicon, header, footer or background, and never set beside the lockup as an equal. The CTS badge appears only in a stamp or sticker mock-up marked "artwork not print-ready", and "CTS" is never written in text.

SECTION 06

# PHOTOGRAPHY & CONSENT

Read before using any image. The work is the product, so the image gets the room and nothing decorative comes near it.

Twenty-nine photographs are approved: 27 finished tattoos and 2 original designs, all by Roger Cazares, all portrait. 21 are JPEG at 1434 to 1714px wide; 6 are cleaned WebP copies at 1080px; the 2 designs are 1536 × 2048. 89 candidates were looked at; 60 were rejected.



Ten of the twenty-nine: memorial portrait, mother and child, hands with flowers, dandelion, swan and cattails, pegasus and moon, wolf pack, hummingbird, butterfly, matching lambs. All by Roger Cazares.

## TREATMENT

| RULE | IN PRACTICE |
|---|---|
| **Crop, straighten, correct exposure** | Nothing else. A modest white balance so black and grey reads neutral |
| **Never retouch a tattoo** | Not a line, the shading, the colour, the redness of fresh work, the skin or a scar |
| **No filters or compositing** | No grade, duotone, gold tint, vignette, grain, background blur, generative fill or upscaling |
| **Never crop through a piece** | Keep the whole piece and enough body to read the placement. Let the black margin grow |
| **The RC monogram stays** | Never erased, covered, recoloured or cut through. Kept whole or wholly out of frame |

| RULE | IN PRACTICE |
|---|---|
| **Caption every piece** | "[piece], [placement]. Roger Cazares." No client, place, date or price; never "healed" or "fresh" unless the manifest says so |
| **No wearer's face** | Crop it out; do not blur |
| **Alt text** | What is in the frame: the piece, the placement, the artist. No keywords, town or praise |

## ORDER BESIDE THE LOGO

Lead with a piece that reads as care: the memorial portrait, the mother and child, the hands with flowers. Not the most severe image on file. The Medusa calf piece and the Dobermans design never sit in the same view as the logo. One saturated colour photograph per view.

**CLEANED COPIES**

Six files once carried another shop's watermark. The agency patched only the watermark's own area on 2026-09-04, and each was compared with its original pixel by pixel on 2026-10-12. A cleaned copy is approved only where the patch sits on background, clothing or bare skin. Check the patched corner at full size before any placement wider than 600px.

## WHAT DOES NOT EXIST

Each of these is a labelled photo slot, never a stand-in: work by Mikayla Paul or Cleo; any view of the studio inside or out; a publishable portrait of anyone at work (the one on file shows another business's sign); a client's face; a process shot; a healed and fresh pair; a recorded cover-up; any landscape image.

**NEVER SHOWN**

Stock photographs of any kind; AI-generated tattoos, skin, people, rooms or logos; licensed characters in a tattoo or a background; another shop's name, sign or watermark; a before and after, above all on a memorial piece; anything from a quarantined folder. If anyone asks for a photograph to come down, it comes down the same day.

SECTION 07

# PROHIBITED CLAIMS

This section overrides everything else in this document, in artwork, captions, alt text and hashtags.

| NEVER | USE INSTEAD |
|---|---|
| **Ownership: "owner", "founder", "owned and operated", "family-owned"** | "Tattoo artist at Cathedral Tattoo Studio" |
| **Tenure: any number of years, "since", "established", "experienced", "veteran". The entity was registered in May 2026** | The work, shown and credited |
| **Licensing or hygiene in the studio's voice: "licensed", "certified", "sterile", "clean", "safe"** | Nothing. No permit or registration number is on file |
| **Premium words: premium, luxury, high-end, elite, exclusive, bespoke, boutique, upscale** | Restraint: more black, fewer and larger images |
| **Superlatives: premier, best, top-rated, #1, award-winning, world-class** | The dated rating line, or a customer's verbatim sentence |
| **Price: any figure, "from", a minimum, a rate, a deposit, "affordable", a discount, a promo, a giveaway, a countdown** | "Tell us what you're thinking about and we'll tell you what it'll take." |
| **Booking model: "by appointment", "appointment only", "booking required", "limited intake", "waiting list"** | "Walk in, or book ahead." |
| **Other businesses: a competitor, a comparison, "unlike other shops", a previous shop** | Say what Cathedral does |
| **Piercing, in any layout. It is unconfirmed** | Nothing |
| **The move: "new location", "moving", "bigger space", a second address** | 1318 Florida Ave SW, and nothing about a move |
| **Reviews: invented, paraphrased, tidied, rounded, undated, star graphics, any quote not on the approved list** | The approved quotes, verbatim, first name, "Google review" |
| **Religion: "Christian", "faith-based", scripture as marketing copy** | Name the piece plainly in its credit |
| **Clichés: "ink" as a noun, "inked", "parlor", "body art", "bring your vision to life", "journey", "transform", "no regrets"** | Piece, work, sitting, session, healed, cover-up, placement |
| **Grief: "honour your loved one", "keep their memory alive", a before and after on a memorial** | Be useful: say what photo to bring |
| **Church vocabulary: "sanctuary", "sacred", "hallowed", "ritual", "congregation"** | Plain words |
| **Hate imagery, licensed characters, impulse or party tattoos, jokes about pain or regret** | Nothing |

## APPROVED REVIEW QUOTES

| QUOTE, VERBATIM | REVIEWER | STATUS |
|---|---|---|
| **"He took my ideas and brought them to life even better than I imagined."** | Keely | Usable |

| QUOTE, VERBATIM | REVIEWER | STATUS |
|---|---|---|
| **"He was professional, patient, and made the whole experience comfortable from start to finish."** | Keely | Usable |
| **"Quality is unreal"** | Tyler | Usable |
| **"I am an anxious person so that's a big deal for me"** | Alesha | CONFIRM BEFORE PUBLISHING names Mikayla in context |
| **"i strictly go to Cleo for all my tattoos!!"** | Kameryn | CONFIRM BEFORE PUBLISHING names Cleo |

Never quoted: anything from the reviewer "hailey paul"; "price friendly"; "Best tattoos you can ever get"; any sentence about cleanliness or what a customer paid. The customers' own lower-case "i" and exclamation marks stay; the brand's own copy still carries none.

**THE THREE-PART TEST FOR EVERY POST**

1. Every line passes this register. 2. It states no fact the studio has not published or confirmed, or that fact sits in a CONFIRM BEFORE PUBLISHING field. 3. Every piece of work shown is credited to the artist who made it, by name, and is listed in the photo manifest.

SECTION 08

# SEVENTEEN COMPONENTS

Each has a live preview and a guideline card in the design system. The repository has no code library, so all but the button are hand-written from the kit's specifications.

## GROUPS

**WORK**
Piece · FeaturePiece · PieceSet · ArtistCard

**PROOF AND INFORMATION**
ReviewQuote · HoursBlock · WhatToExpect · FAQ · OpenDates · NeutralNotice

**ACTIONS AND FORMS**
Button · ContactForm

**NAVIGATION**
Header · Footer · MobileActionBar

**KIT ONLY, NEVER PUBLIC**
PhotoSlot · ConfirmBadge


## THE CONTRACT

| COMPONENT | WHAT IT IS FOR |
|---|---|
| **Button** | "See the work" primary, "Call or text (225) 301-9527" secondary, and the underlined gold link. From the token file's two classes |
| **Piece** | The basic unit: a square-cornered photo, a gold label naming the kind of piece, and the credit |
| **FeaturePiece** | One photograph alone in a view with 128px of black above and below. The default way to show work |
| **PieceSet** | Two to four pieces of one kind in a row, all at one ratio |
| **ArtistCard** | Portrait and piece, name, the fixed title, one sentence, a link. Slots for anyone not yet cleared |
| **ReviewQuote** | One verbatim customer sentence in the raised panel, hairline above |
| **HoursBlock** | Hours table, "Walk in, or book ahead.", address, phone button |
| **WhatToExpect** | Three or four numbered steps for the first-timer, gold numerals |
| **FAQ** | Straight answers in native disclosure rows |
| **OpenDates** | Months with one status word each and "Check open dates". Only with real dates |
| **NeutralNotice** | The system has no info colour; this raised panel with a gold icon is it |
| **ContactForm** | One-column message form with literal labels. Only if the studio agrees |
| **Header** | 72px, the cross at 40px linking home, sentence-case nav, the phone button |

| COMPONENT | WHAT IT IS FOR |
|---|---|
| **Footer** | Name, address, phone, hours, Instagram, dated rating. No logo, no URL |
| **MobileActionBar** | The two actions, pinned, equal width, under 640px |
| **PhotoSlot** | A labelled placeholder for a picture that does not exist yet |
| **ConfirmBadge** | "Confirm before publishing" in warning amber. Never in a public piece |

## RENDERED SPECIMENS

Every plate below is the component rendered live from the design system's own stylesheet and tokens.

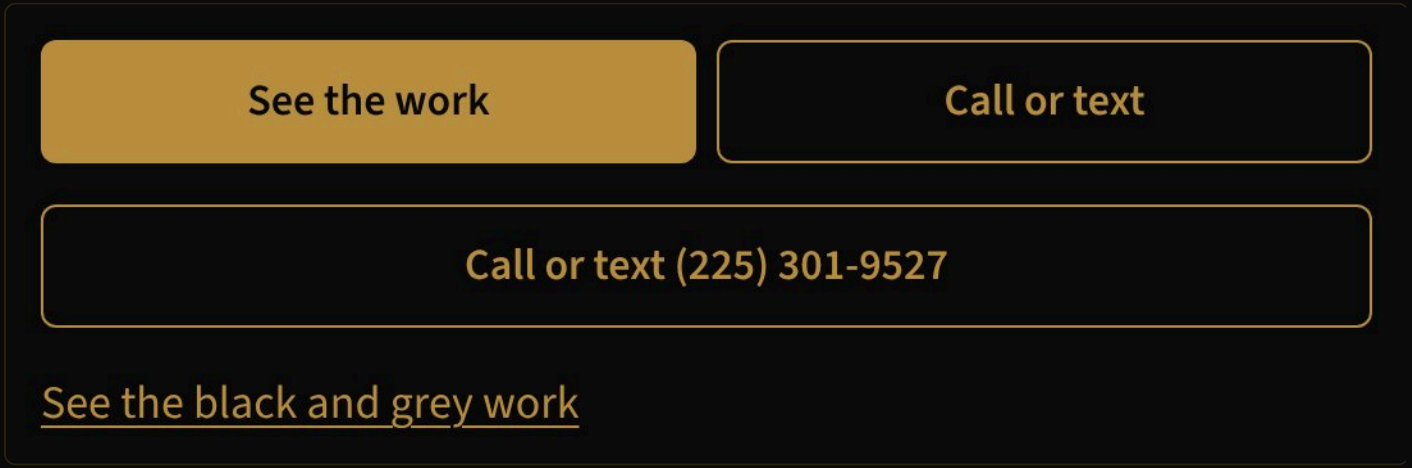


ACTIONS · BUTTON

Primary and secondary at equal width, the full phone label, and a link that names its destination.



MEMORIAL AND PORTRAIT

Memorial portrait, forearm. Roger Cazares.



FINE LINE AND DOTWORK

Mother and baby hands with flowers, forearm. Roger Cazares.

WORK · PIECE

Credit beneath, label above it in gold. Never text on the photo.

MEMORIAL AND PORTRAIT




Memorial portrait, forearm. Roger Cazares.




Dog portrait with name script, forearm. Roger Cazares.



Mother and child with flowers, forearm sleeve. Roger Cazares.

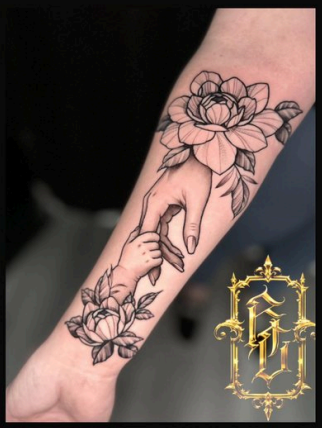

Mother and baby hands with flowers, forearm. Roger Cazares.

WORK · PIECESET

Four memorial and portrait pieces at 3:4, credited.

Roger Cazares at work.

CONFIRM BEFORE PUBLISHING



## Roger Cazares

Tattoo artist at Cathedral Tattoo Studio

Black and grey portraits, religious pieces, fine line and dotwork.

See Roger Cazares's work

Portrait.

A piece of work.

## Mikayla Paul

CONFIRM BEFORE PUBLISHING

Tattoo artist at Cathedral Tattoo Studio

WORK · ARTISTCARD

Roger Cazares with a portrait slot and a real piece; Mikayla Paul as a flagged slot.


"He was professional, patient, and made the whole experience comfortable from start to finish."

**Keely**

Google review

PROOF · REVIEWQUOTE

Verbatim, upright, Source Sans 3. No stars.

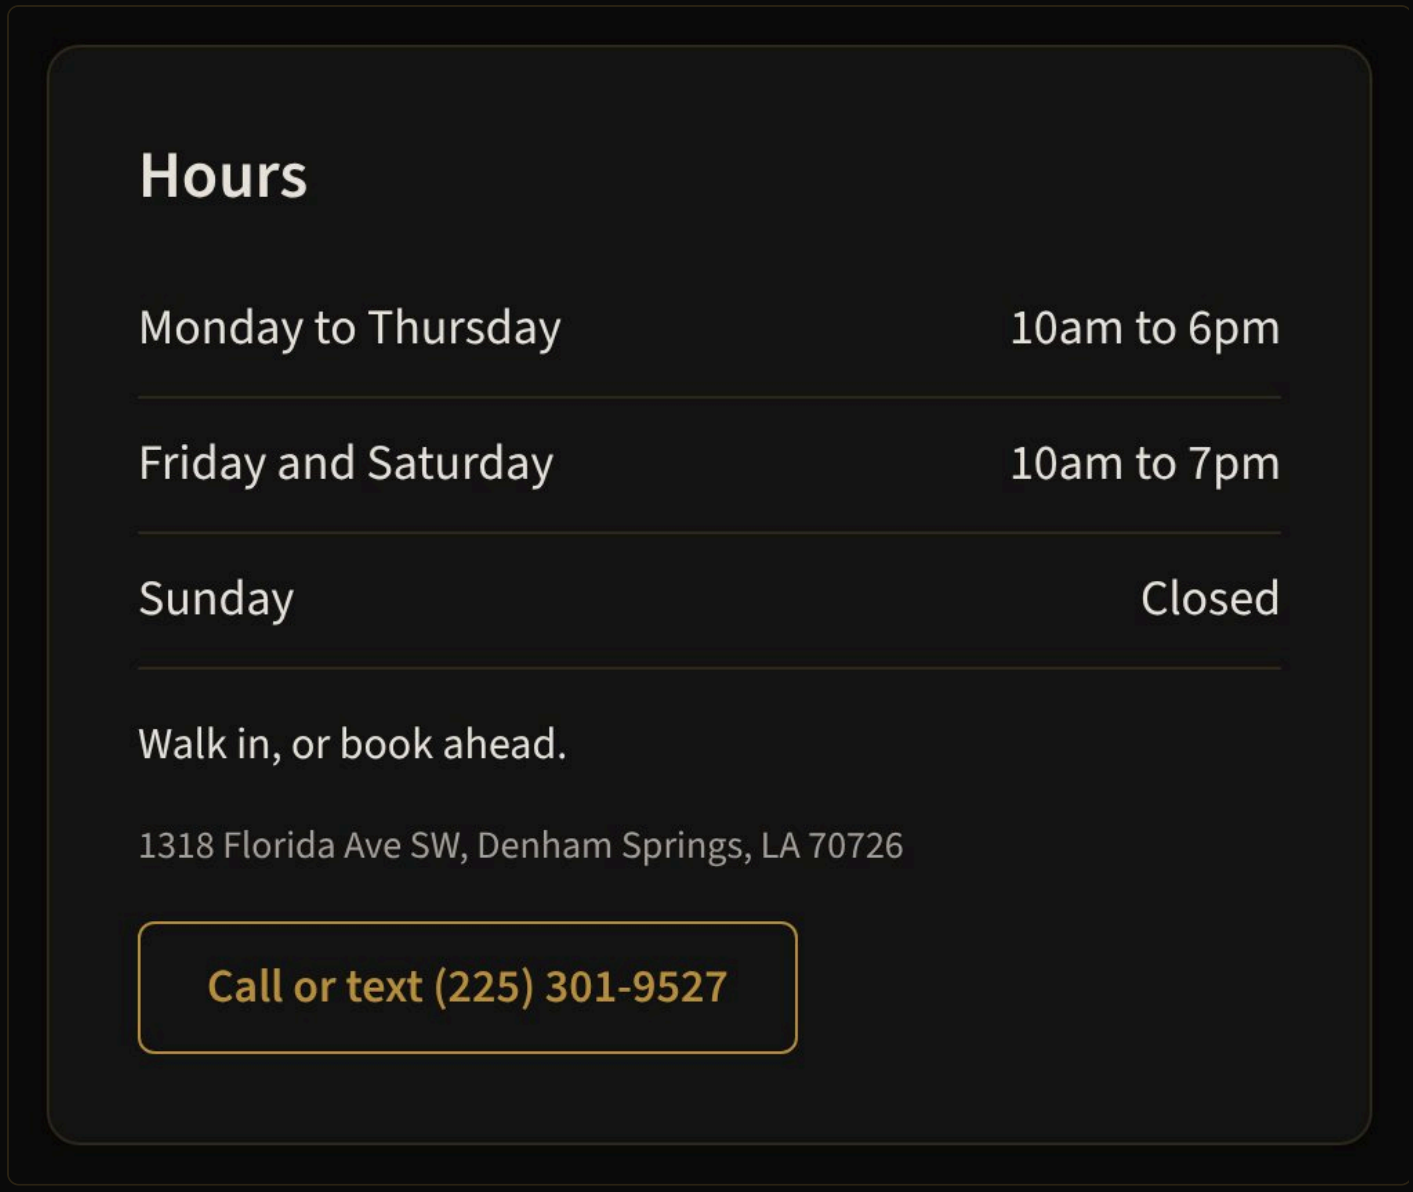


INFORMATION · HOURSBLOCK

Sunday reads "Closed" in words.

# WHAT TO EXPECT

CONFIRM BEFORE PUBLISHING

1 **Look at the work first**

Every piece is credited to the artist who made it.

2 **Tell us what you're thinking about**

What you want tattooed, roughly where and roughly what size. You don't need to have it worked out.

3 **First one? Tell us**

We'll walk you through what happens before anything starts, and you can ask whatever you want.

INFORMATION · WHATTOEXPECT

Steps assembled from the kit's own lines, flagged until the studio confirms them.

# QUESTIONS

## Do I need an appointment?


No. Walk in, or book ahead. Monday to Thursday 10am to 6pm. Friday and Saturday 10am to 7pm. Closed Sunday.

## What does it cost?

## It's my first tattoo and I'm nervous.


INFORMATION · FAQ

Answers from the kit's objection handling. Never a price.

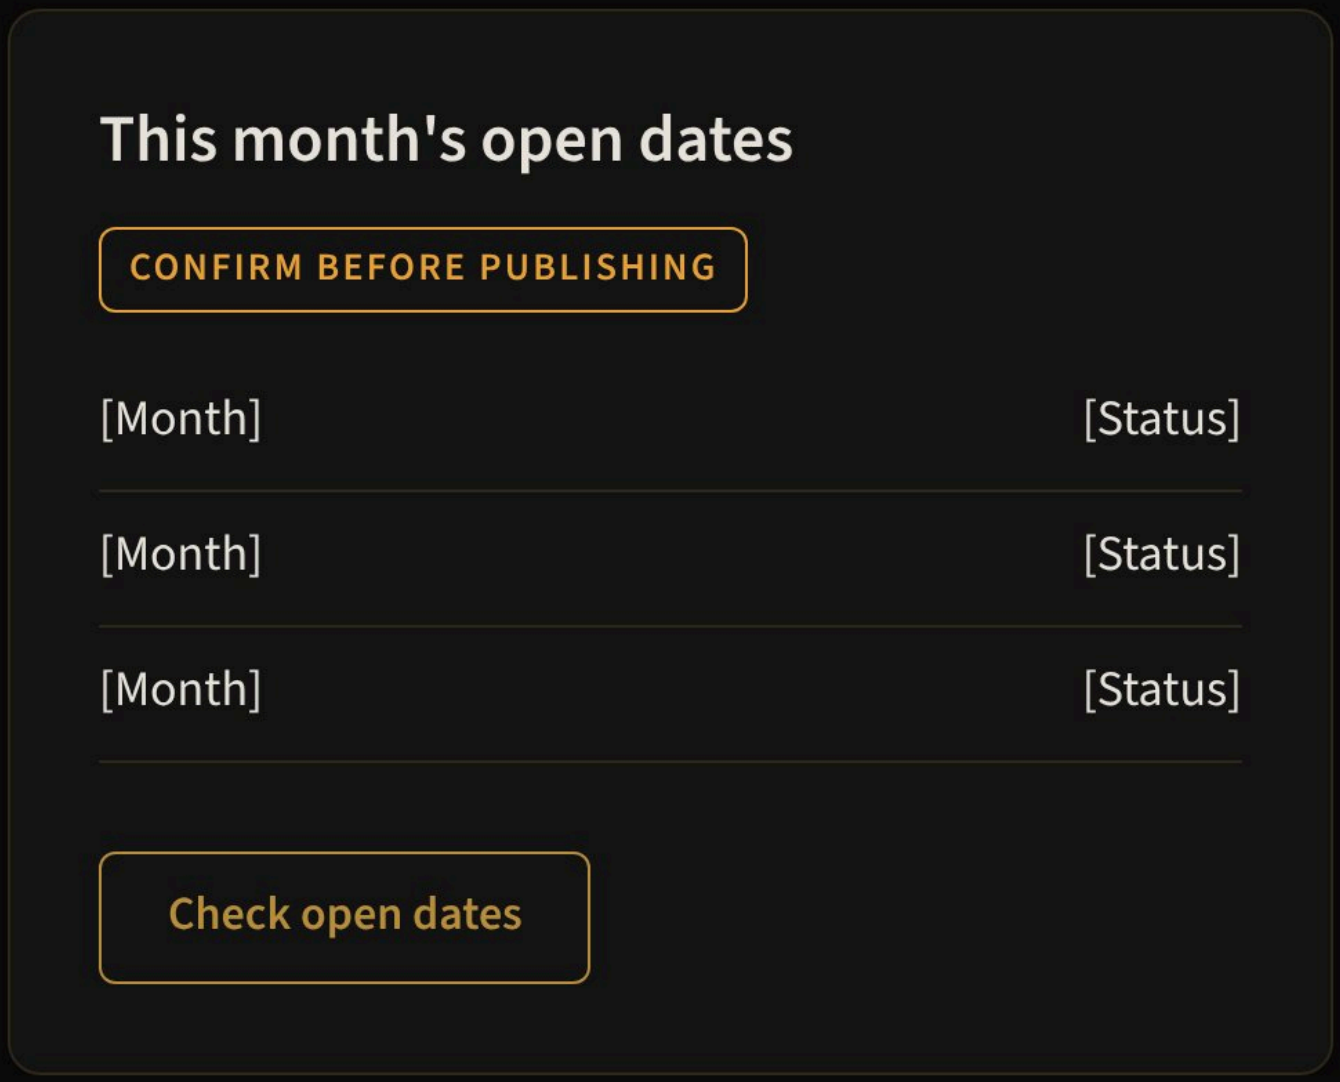


INFORMATION · OPENDATES

Labelled slots only; no sample date is presented as real.

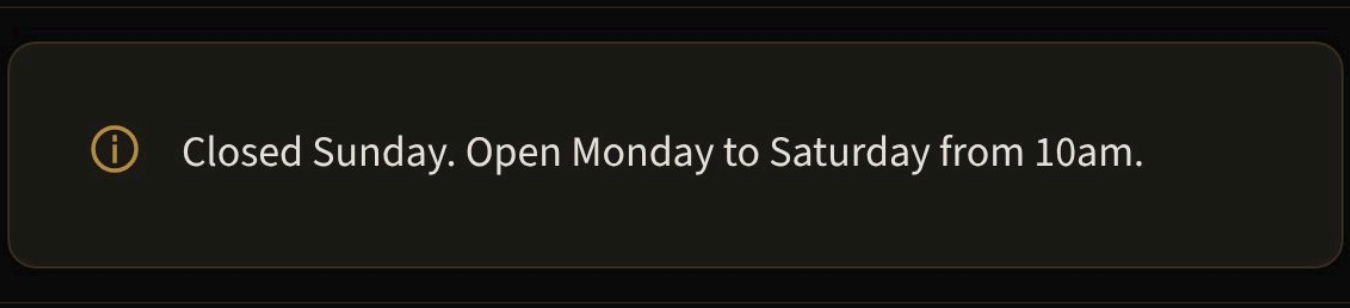


INFORMATION · NEUTRALNOTICE

CONFIRM BEFORE PUBLISHING

**What do you want tattooed?**

You don't need to have it worked out.

**Roughly where, and how big? (optional)**

**Your first name**

Keely

**Phone number**

Add a phone number so we can text you back.

Send

FORMS · CONTACTFORM

Error stated in words with an icon, never colour alone.

The work  What to expect  Hours  Call or text (225) 301-9527

NAVIGATION · HEADER

The current item carries a gold underline as well as colour.

**Cathedral Tattoo Studio**

1318 Florida Ave SW

Denham Springs, LA 70726

Call or text (225) 301-9527

Monday to Thursday, 10am to 6pm

Friday and Saturday, 10am to 7pm

Sunday, closed

Walk in, or book ahead.

Instagram @cathedral_tattoostudio

5.0 on Google from 6 reviews (October 11, 2026)

NAVIGATION · FOOTER

No logo, no website, the rating dated.

See the work

Call or text

NAVIGATION · MOBILEACTIONBAR

The front room at 1318 Florida Ave SW.

CONFIRM BEFORE PUBLISHING

Photograph needed from the studio.

Work by Mikayla Paul.

CONFIRM BEFORE PUBLISHING

Photograph and consent needed from the studio.

KIT · PHOTOSLOT

Never shipped in a public piece.

CONFIRM BEFORE PUBLISHING

Work worth carrying

KIT · CONFIRMBADGE

## INTENTIONAL ADDITIONS

The kit names cards, buttons, the hours block, the review quote, the rating line, what to expect, FAQ, open dates, the neutral notice, the photo slot and the confirm badge. Five components go beyond that list, each for a stated reason:

- **FeaturePiece and PieceSet**: the kit's "feature piece" and "piece set" rules made reusable, so "fewer, larger" is the default and not a judgement call.
- **Header, Footer and MobileActionBar**: specified in the layout rules rather than the component list; built so the phone and the address have exactly one place to live.
- **ContactForm**: specified and flagged in the kit; built so it exists the day the studio agrees, and not before.

SECTION 09

# SOCIAL, VIDEO & DATA CONTENT

Architecture, not a template pack: the composition rules are reusable, and every visual value comes from the brand tokens already in place.

## THE TOKEN FLOW

```
BRAND TOKENS     tokens.json    cts-* colours, cts-space-*, cts-radius-*, heading and body families
      ↓
SOCIAL LAYER     bundle.css     --social-* and --data-* aliases (no raw colour, no font)
                 tokens.json    format-*, safe-*, social-pad, the "Social (1080 canvas)" type styles
      ↓
CONTENT FAMILY   finished piece · healed · process · open dates · walk-in · first time · portrait
                 checklist · cover-up · aftercare · meet the artist · review · rating · hours · FAQ
      ↓
PLATFORM FORMAT  one canvas per format-* token, sized by the Platform Specifications table
      ↓
FINAL ASSET      a composed template; 99 exported PNGs in design-kit/exports/social-templates/
```

## RULES THAT ARE NOT NEGOTIABLE

### RECOMPOSE, NEVER RESIZE

A 4:5 card puts the piece full width with the credit beneath; the Google post puts it left and the credit right; the 9:16 version holds it between the chrome bands. A tattoo is never cropped through: the black margin grows.

### THE WORK LEADS, AND THE ARTIST IS NAMED

The photograph is the largest thing on any canvas that has one. Every piece carries "[piece], [placement]. [artist]." on the canvas, in the caption and in the alt text.

### BLACK IS THE FIELD, GOLD IS ONE SMALL THING

Every canvas is dark. Gold appears as one hairline or one small element, plus the logo if present, plus a button if any.

### ONLY WHAT THE STUDIO HAS SAID

Real photographs only. The only published figure is the dated Google rating. No chart is built: there is no data behind one.

## MASTER FORMAT FAMILIES

| FAMILY | SIZE | RATIO | USED HERE BY |
|---|---|---|---|
| **Portrait feed** | 1080 × 1350 | 4:5 | Instagram and Facebook feed, carousels. First priority |
| **Square** | 1080 × 1080 | 1:1 | Instagram and Facebook feed |
| **Full-screen portrait** | 1080 × 1920 | 9:16 | Stories, reel covers, TikTok covers, highlights |
| **Google post** | 1200 × 900 | 4:3 | Google Business Profile updates |
| **Social landscape** | 1200 × 630 | 1.91:1 | Link previews |

| FAMILY | SIZE | RATIO | USED HERE BY |
|---|---|---|---|
| **Widescreen** | 1920 × 1080 | 16:9 | Video end frame |
| **Tall content · wide banner · thumbnail** | 1000 × 1500 · 1500 × 500 · 1280 × 720 | 2:3 · 3:1 · 16:9 | Architecture only: no platform in use |




MASTER FORMATS AS RATIO TILES

Each canvas reads --format-<name>-w and -h; no template types a dimension.

## PER-PLATFORM SPECIFICATION

Working values dated 2026-10-12. Platforms change these without notice: verify each row at production and re-date it.

| PLATFORM | ASSET | SIZE | SAFE ZONE | CROP BEHAVIOUR | STATUS |
|---|---|---|---|---|---|
| **Instagram** | Feed portrait / square | 1080 × 1350 / 1080 | 96px margin | Grid crops the preview; keep the piece central | In use |
| **Instagram** | Story / reel cover | 1080 × 1920 | Clear top 250, bottom 340 | Chrome covers both | In use |
| **Instagram** | Profile image | 1080 master, 320 shown | Central 70% | Circular | In use |
| **Instagram** | Highlight cover | 1080 × 1920 | Central 600px circle | Circular, very small | In use |
| **Google Business** | Update post | 1200 × 900 | 64px margin | Shown small; type must survive | In use |
| **Google Business** | Cover / logo | 1080 × 608 / 720 | Centre / 70% | Square and circular crops | In use |
| **Facebook** | Feed / story | Shared masters | As Instagram | Grid crops toward 1:1 | In use |
| **Facebook** | Page cover | 1640 × 924 | Middle 1640 × 624 | Desktop crops to the middle strip | In use |
| **Facebook** | Link preview | 1200 × 630 | 60px margin | None | In use |

| PLATFORM | ASSET | SIZE | SAFE ZONE | CROP BEHAVIOUR | STATUS |
|---|---|---|---|---|---|
| **TikTok** | Cover / profile | 1080 × 1920 / 1080 | Centre 1080 × 1420 | Caption and controls cover bottom and right | Unverified |
| **YouTube, X, LinkedIn, Pinterest, Threads, Bluesky, Snapchat, Reddit, Mastodon, Yelp** | Rows kept | Shared masters | 60px margin | Platform specific | Not in use |

ADDING A PLATFORM

1. Add the canvas to the format list. 2. Add its --format-<name>-w and -h tokens. 3. Add a row with its safe zone, crop behaviour and the date checked. 4. Recompose the existing families into the new ratio. A new platform means new rows and tokens; no existing template is edited.

## SOCIAL TYPE SCALE AND SPACING

| STYLE | SIZE AT 1080 | FACE | ROLE |
|---|---|---|---|
| **social-display** | 88px | Cinzel 600 | One line of four words at most |
| **social-headline** | 64px | Cinzel 600 | Six words, two lines at most |
| **social-headline-story** | 72px | Cinzel 600 | Story and reel cover headline |
| **social-stat** | 200px | Cinzel 600 | The rating figure only |
| **social-quote** | 52px | Source Sans 3 400 | Review quote, upright |
| **social-subhead** | 44px | Source Sans 3 600 | One statement or question |
| **social-body** | 36px | Source Sans 3 400 | Smallest running text |
| **social-numeral** | 40px | Source Sans 3 400 | Dates and step numbers, tabular |
| **social-label · credit · source** | 30px | Source Sans 3 | Eyebrow, credit, citation |

Canvas padding 96px; stack gaps 32 and 16px; the master spacing scale and nothing between. Cinzel once per canvas; two sizes plus a label at most.

## DATA PALETTE AND THE DATA RULE

**--DATA-1**
#E8E4DC
Text. Primary series, 15.61.

**--DATA-2**
#B99040
Gold. Second series, hatched, 6.72.

**--DATA-3**
#A9A29A
Muted. Third series, dotted, 7.85.

**--DATA-HIGHLIGHT**
#EBC853
The one figure discussed, 12.18.

NO CHART WITHOUT DATA

The studio publishes one figure: "5.0 on Google from 6 reviews (October 11, 2026)", always with "Source: Google Business Profile, read October 11, 2026". No chart, statistic or count is built. Any other tile carries the sample-data flag and is never published. The chart frame (title, subtitle, axis, labels, values, legend, source, date, footnote) is defined for a future client and never rendered here.

## CONTENT FAMILIES AVAILABLE

Finished piece with credit · Healed · Process · Open dates · Walk-in notice · First time · What to bring for a portrait · Cover-up answers · Aftercare · FAQ · Meet the artist · Review · Rating · Hours and location · Work carousel · Video covers and end frames · Banners and highlight covers · Avatars. In a feed of nine posts, at least five are work.

## FAMILIES DROPPED, AND WHY

| FAMILY | REASON |
|---|---|
| **Price, offers, giveaways, flash days, countdowns** | No published price; register item 6 |
| **Piercing** | Unconfirmed; register item 9 |
| **Before and after on memorial work** | Register item 14 |
| **Charts, statistics, dashboards, case studies, client results** | No data and no metrics exist |
| **Comparison, myth versus fact, commentary** | Nothing may be said about other studios |
| **Webinar, podcast, event, blog promotion; hiring** | None run, no website; recruitment is where ownership claims slip in |
| **The move; awards and milestones** | Register items 10 and 2 |
| **YouTube thumbnails** | No channel. The row stays in the table |

# THE TEMPLATE LIBRARY, RENDERED

**Social / Feed / Portrait / Finished piece**

Portrait feed 1080 × 1350



Black and grey wolf pack, half sleeve. Roger Cazares.

**Social / Feed / Square / Finished piece**

Square 1080 × 1080




Dotwork swan and cattails, thigh. Roger Cazares.

**Social / Story / Finished piece**

Story 1080 × 1920

PLATFORM CHROME: KEEP CLEAR



Fine line dandelion, ribs. Roger Cazares.

PLATFORM CHROME: KEEP CLEAR

**Social / Google Post / Finished piece**

Google post 1200 × 900



Black and grey wolf pack, half sleeve. Roger Cazares.

Walk in, or book ahead.

**Social / Feed / Portrait / Finished piece / Slot**

Portrait feed 1080 × 1350


Work by Mikayla Paul. Photograph and consent needed from the studio.

CONFIRM BEFORE PUBLISHING

[piece], [placement]. Mikayla Paul.


## FINISHED PIECE

Portrait, square, story and Google post, recomposed. The slot for Mikayla Paul stays flagged.

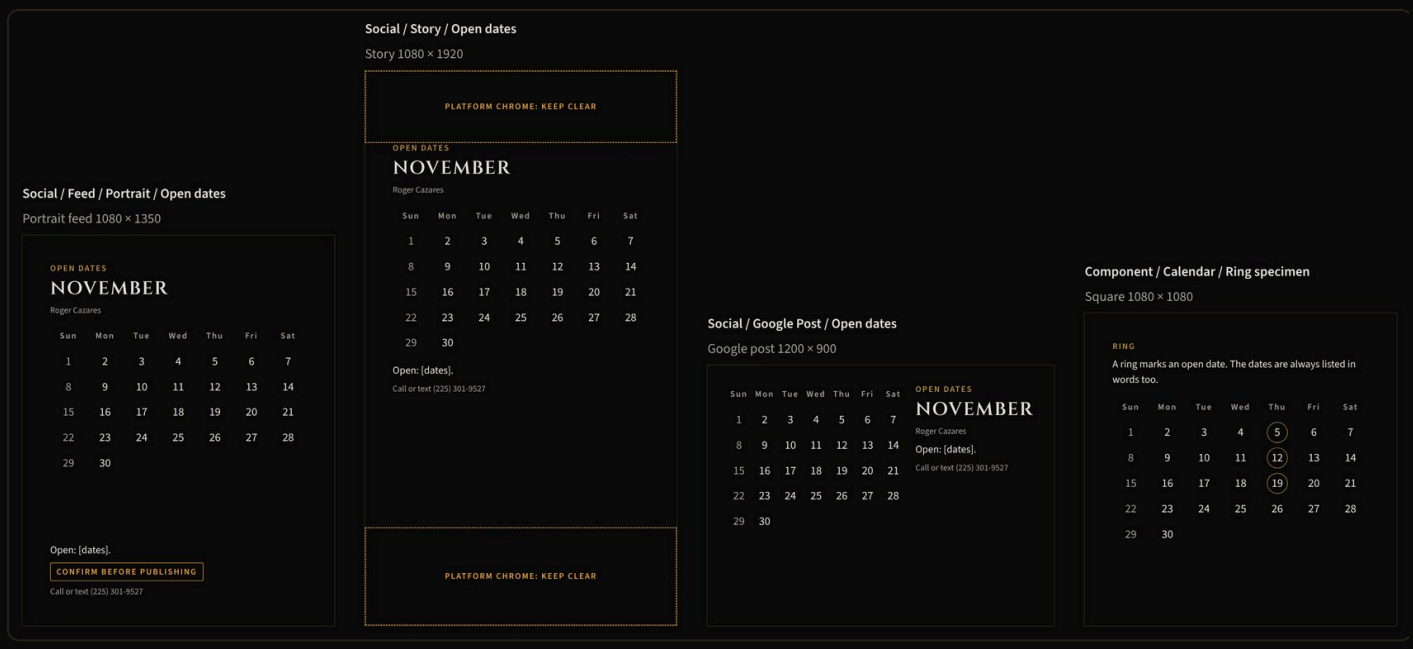


## OPEN DATES

The studio's own monthly calendar, kept and restyled. A ring is always paired with the dates in words.

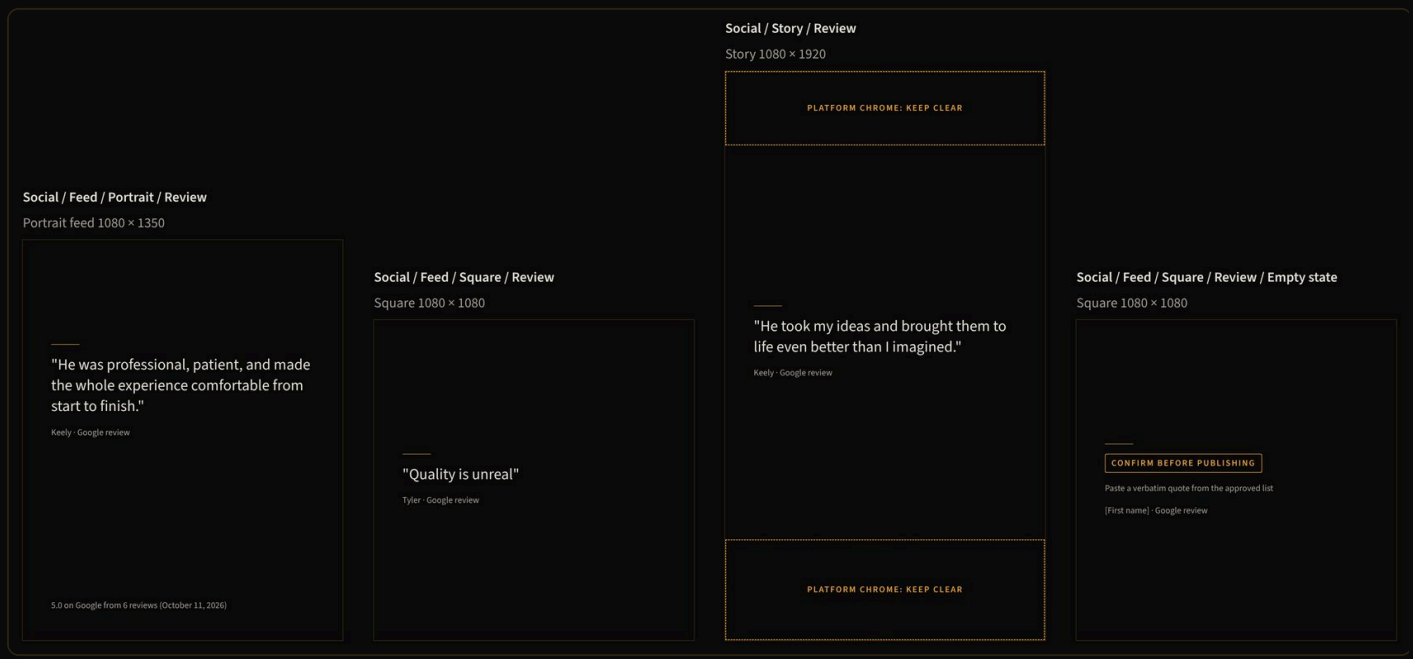


## REVIEW

Verbatim, first name, "Google review". The empty state shows the badge, never a placeholder sentence.

### Social / Feed / Square / Rating

Square 1080 × 1080

5.0

on Google from 6 reviews (October 11, 2026)

Source: Google Business Profile, read October 11, 2026

### Data / KPI / Two metric

Portrait feed 1080 × 1350

KPI TILES

5.0

on Google · October 11, 2026

6

reviews · October 11, 2026

Source: Google Business Profile, read October 11, 2026

**No chart without data.**

This studio publishes one figure: the dated Google rating. No chart, statistic or count is built.

### Data / Palette and sample flag

Portrait feed 1080 × 1350

DATA PALETTE

--data-1 · text

--data-2 · gold, hatched

--data-3 · muted, dotted

--data-highlight · gold bright

40%

Sample data. Not a published figure.

RATING, KPI TILES AND THE DATA PALETTE

### Social / Feed / Portrait / Hours

Portrait feed 1080 × 1350

HOURS

| | |
|---|---|
| Monday to Thursday | 10am to 6pm |
| Friday and Saturday | 10am to 7pm |
| Sunday | Closed |

Walk in, or book ahead.

1318 Florida Ave SW, Denham Springs, LA 70726

Call or text (225) 301-9527

### Social / Google Post / Hours

Google post 1200 × 900

HOURS

| | |
|---|---|
| Monday to Thursday | 10am to 6pm |
| Friday and Saturday | 10am to 7pm |
| Sunday | Closed |

Walk in, or book ahead.

1318 Florida Ave SW, Denham Springs, LA 70726

Call or text (225) 301-9527

### Social / Feed / Square / Closure notice

Square 1080 × 1080

CLOSED

**We're closed [day, date]. Back [day] at 10am.**

CONFIRM BEFORE PUBLISHING

HOURS AND CLOSURE

**Social / Feed / Portrait / Walk-in notice**

Portrait feed 1080 × 1350



TODAY

**[Artist] has no bookings today. Walk in between 10am and 6pm.**

CONFIRM BEFORE PUBLISHING

Call or text (225) 301-9527

**Social / Feed / Square / Walk-in, standing**

Square 1080 × 1080

HOURS

**Walk in, or book ahead. Monday to Thursday 10am to 6pm. Friday and Saturday 10am to 7pm. Closed Sunday.**

Call or text (225) 301-9527

**Social / Google Post / Walk-in notice**

Google post 1200 × 900

TODAY

**[Artist] has no bookings today. Walk in between 10am and 7pm.**

Call or text (225) 301-9527

## WALK-IN NOTICE

A fact for the day, never a headline. No Cinzel.

**Social / Feed / Portrait / First time**

Portrait feed 1080 × 1350

FIRST TIME

FIRST TIME, OR NERVOUS ABOUT IT

Say so when you come in. We'll walk you through what happens before anything starts, and you can ask whatever you want.

Call or text (225) 301-9527

**Social / Feed / Square / First time**

Square 1080 × 1080

FIRST TIME

**First one? Tell us. Being nervous about it is more common than people let on.**

**Social / Story / First time**

Story 1080 × 1920

PLATFORM CHROME: KEEP CLEAR

FIRST TIME

FIRST TIME, OR NERVOUS ABOUT IT

Say so when you come in. We'll walk you through what happens before anything starts.

"I am an anxious person so that's a big deal for me"

Alesha · Google review

CONFIRM BEFORE PUBLISHING

PLATFORM CHROME: KEEP CLEAR

**Social / Google Post / First time**

Google post 1200 × 900

The room. Photograph needed from the studio.

CONFIRM BEFORE PUBLISHING

FIRST TIME, OR NERVOUS ABOUT IT

Say so when you come in. We'll walk you through it.

## FIRST TIME

**Infographic / Checklist / Portrait**

Portrait feed 1080 × 1350

WHAT TO BRING FOR A PORTRAIT

- ☐ The clearest photo you have. Face-on is best, but most things can be worked with.
- ☐ A second photo if you have one. More to look at helps.
- ☐ Roughly where you want it, and roughly what size.
- ☐ Any questions. We'll talk through placement and size before anything gets drawn.

Call or text (225) 301-9527

**Social / Carousel / Cover**

Portrait feed 1080 × 1350

WHAT TO BRING FOR A PORTRAIT



Black and grey memorial portrait, forearm. Roger Cazares.

Call or text (225) 301-9527 1 / 4 →

**Social / Carousel / Content**

Portrait feed 1080 × 1350

1 OF 4

**The clearest photo you have. Face-on is best, but most things can be worked with.**

Call or text (225) 301-9527 2 / 4 →

**Social / Carousel / Closer**

Portrait feed 1080 × 1350

Cathedral - Tattoo Studio -

Walk in, or book ahead.

See the work

Call or text (225) 301-9527

## WHAT TO BRING FOR A PORTRAIT

**Infographic / Steps / Aftercare**

Story 1080 × 1920

LOOKING AFTER IT

CONFIRM BEFORE PUBLISHING

1. Leave the wrap on for 2 hours.
2. Wash gently with clean hands and unscented soap. Pat dry, don't rub.
3. A thin layer of unscented moisturizer, 2 to 3 times a day.
4. No soaking for 2 weeks. No baths, pools or swimming. Showers are fine.
5. Keep it out of the sun. Once healed, sunscreen keeps it sharp.
6. It'll peel and itch. Don't pick it, don't scratch it.

Anything looks wrong, call us: (225) 301-9527

**Social / Carousel / Cover**

Portrait feed 1080 × 1350

AFTERCARE

LOOKING AFTER IT

CONFIRM BEFORE PUBLISHING

Call or text (225) 301-9527 1 / 8 →

**Social / Carousel / Content**

Portrait feed 1080 × 1350

STEP 2

**Wash gently with clean hands and unscented soap. Pat dry, don't rub.**

Call or text (225) 301-9527 3 / 8 →

**Social / Carousel / Closer**

Portrait feed 1080 × 1350

Cathedral - Tattoo Studio -

Anything looks wrong, call us: (225) 301-9527

Call or text (225) 301-9527 8 / 8

## AFTERCARE

The whole family waits on the artist's confirmation.

**Social / Feed / Square / FAQ**

Square 1080 × 1080

QUESTIONS

**How much will it cost?**

It depends on the size, the placement and the detail. Tell us what you're thinking about and we'll tell you what it'll take.

Call or text (225) 301-9527

**Social / Carousel / Cover**

Portrait feed 1080 × 1350

QUESTIONS

STRAIGHT ANSWERS

Call or text (225) 301-9527 1 / 5 →

**Social / Carousel / Content**

Portrait feed 1080 × 1350

**Do I need to book?**

No. Walk in, or book ahead. Larger pieces are planned first, so book ahead for those.

Call or text (225) 301-9527 3 / 5 →

**Social / Google Post / FAQ**

Google post 1200 × 900

**I don't have it worked out yet. Is that all right?**

Yes. Bring a reference photo, a screenshot or just the idea. You don't need to have it worked out.

Call or text (225) 301-9527

## FAQ

**Social / Feed / Portrait / Meet the artist**

Portrait feed 1080 × 1350

Roger Cazares at work. A cleared photograph is needed: the one on file shows another business.

CONFIRM BEFORE PUBLISHING

ROGER CAZARES

Tattoo artist at Cathedral Tattoo Studio

Roger works mostly in black and grey: portraits, fine line and dotwork, lettering, and large-scale sleeve and back pieces. He also does color and cover-ups.

Instagram: @rc_tattoos

**Social / Carousel / Content**

Portrait feed 1080 × 1350



Dotwork pegasus and moon, half sleeve. Roger Cazares.

Call or text (225) 301-9527

2 / 4 →

**Social / Feed / Portrait / Meet the artist / Slot**

Portrait feed 1080 × 1350

Portrait.

MIKAYLA PAUL

CONFIRM BEFORE PUBLISHING

Tattoo artist at Cathedral Tattoo Studio

**Social / Google Post / Meet the artist**

Google post 1200 × 900

Roger Cazares at work.

ROGER CAZARES

Tattoo artist at Cathedral Tattoo Studio

Black and grey portraits, fine line and dotwork, lettering, and large-scale pieces.

## MEET THE ARTIST

**Social / Feed / Portrait / Healed**

Portrait feed 1080 × 1350

Healed work. A photograph the artist confirms was taken after healing.

HEALED

[piece], [placement]. Healed, [age]. Roger Cazares.

CONFIRM BEFORE PUBLISHING

**Social / Feed / Square / Healed**

Square 1080 × 1080

Healed work.

HEALED

[piece], [placement]. Healed, [age]. Roger Cazares.

**Social / Google Post / Healed**

Google post 1200 × 900

Healed work.

HEALED

[piece], [placement]. Healed, [age]. Roger Cazares.

CONFIRM BEFORE PUBLISHING

## HEALED (PHOTO SLOTS)

**Social / Feed / Portrait / Process**

Portrait feed 1080 × 1350



Process: stencil on skin, the drawing, or mid-sitting.

IN PROGRESS

**Stencil on, before the first line.**

[piece], [placement]. Roger Cazares.

**Social / Story / Process**

Story 1080 × 1920

PLATFORM CHROME: KEEP CLEAR



Process photograph.

IN PROGRESS


**Second sitting of [number].**

CONFIRM BEFORE PUBLISHING

PLATFORM CHROME: KEEP CLEAR

**Social / Google Post / Process**

Google post 1200 × 900



Process photograph.

IN PROGRESS

**The drawing comes first. Then we check it against the placement.**

PROCESS (PHOTO SLOTS)

# STORY, VIDEO AND CAROUSEL

**Video / Vertical / Cover / Work**

Story 1080 × 1920

PLATFORM CHROME: KEEP CLEAR



Color hummingbird, forearm. Roger Cazares.

PLATFORM CHROME: KEEP CLEAR

**Video / Vertical / Cover / Process**

Story 1080 × 1920

PLATFORM CHROME: KEEP CLEAR

Process photograph.

IN PROGRESS

Stencil on, before the first line.

PLATFORM CHROME: KEEP CLEAR

**Video / Vertical / Cover / Text**

Story 1080 × 1920

PLATFORM CHROME: KEEP CLEAR

OPEN DATES

OPEN DATES

PLATFORM CHROME: KEEP CLEAR

**Video / End frame / Vertical**

Story 1080 × 1920

Cathedral
Tattoo Studio

Walk in, or book ahead.

Call or text (225) 301-9527

**Video / End frame / Widescreen**

Widescreen 1920 × 1080

Cathedral
Tattoo Studio

Walk in, or book ahead.

Call or text (225) 301-9527

## VIDEO COVERS AND END FRAMES

The centre band is the only safe area: chrome covers 250px at the top and 340px at the bottom.

**Social / Carousel / Cover**

Portrait feed 1080 × 1350

BLACK AND GREY

ROGER CAZARES



Black and grey wolf pack, half sleeve. Roger Cazares.

Call or text (225) 301-9527 1 / 5 →

**Social / Carousel / Content**

Portrait feed 1080 × 1350



Black and grey memorial portrait, forearm. Roger Cazares.

Call or text (225) 301-9527 2 / 5 →

**Social / Carousel / Content**

Portrait feed 1080 × 1350



Mother and child with flowers, forearm sleeve. Roger Cazares.

Call or text (225) 301-9527 3 / 5 →

**Social / Carousel / Closer**

Portrait feed 1080 × 1350

Cathedral
Tattoo Studio

Walk in, or book ahead.

See the work

Call or text (225) 301-9527

## CAROUSEL: COVER, CONTENT, CLOSER

Page numbers, a swipe arrow, one ratio. The logo appears on the closer only.

# BANNERS, COVERS AND AVATARS

**Banner / Facebook**

Facebook page cover 1640 × 924




**Banner / Facebook / Split**

Facebook page cover 1640 × 924




**Banner / Google**

Google cover 1080 × 608




**Social / Link preview**

Link preview 1200 × 630




**Highlight / Work**

Story 1080 × 1920




**Highlight / Open dates**

Story 1080 × 1920




**Highlight / Aftercare**

Story 1080 × 1920




**Highlight / Artists**

Story 1080 × 1920




**Highlight / Hours**

Story 1080 × 1920




**Highlight / First time**

Story 1080 × 1920




## BANNERS AND COVERS

Facebook 1640 × 924 with its desktop strip marked; the supplied Google cover and link card; six highlight covers.

**Avatar / Rose window / Square**

320 px



**Circular crop**

320 px



**Rounded square**

180 px



**Rose window**

64 px



**Avatar / Cross**

48 px



**Cross**

32 px



**Cross**

16 px




**Never as the avatar**

The full lockup squeezed into a circle, the RC monogram, the CTS badge, a photograph of a tattoo, or a portrait of an artist.

## AVATAR SYSTEM

The rose window is the master; the cross takes over below 64px.

# ONE CONCEPT, EVERY FORMAT

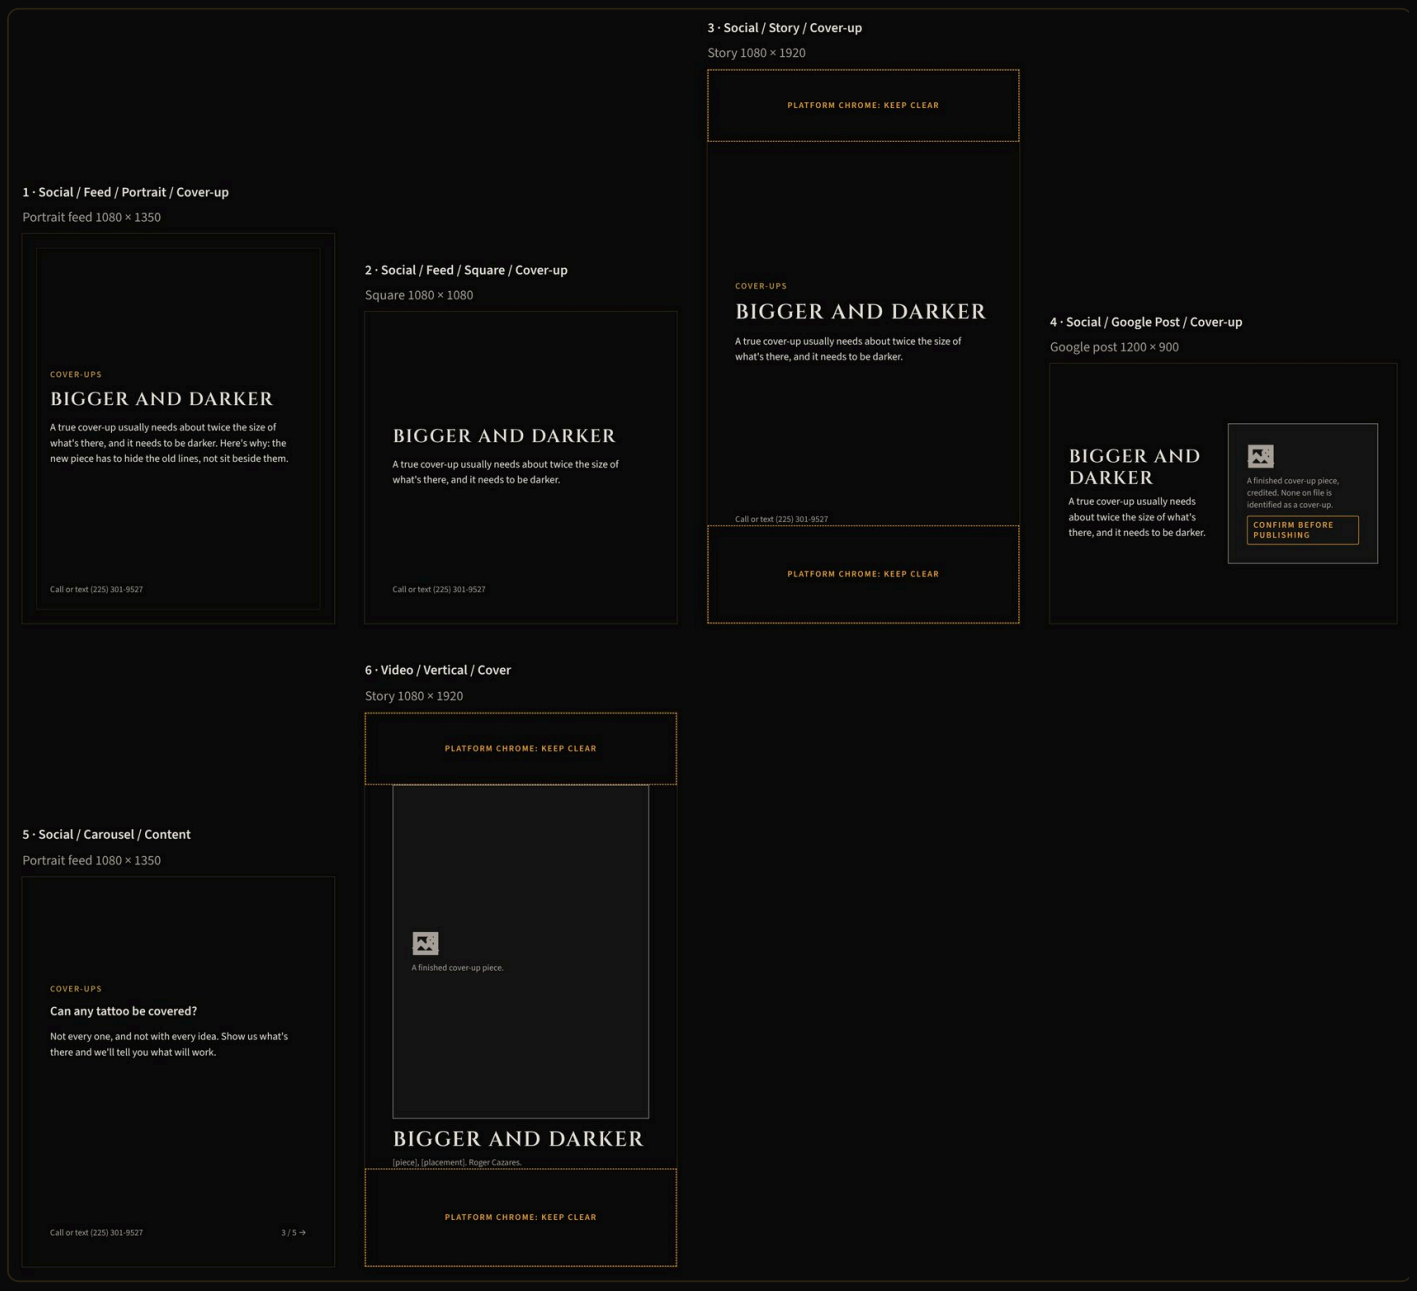


"BIGGER AND DARKER"

The same message and hierarchy recomposed across every ratio. A crop is not a template.


# THE DECORATION LAYER

Five grounds (flat, photo, framed, split, panel) and three gestures (hairline, keyline, ring), one gesture per canvas. That is the whole layer, and the restraint is the point.


**Ground / Flat**
Square 1080 × 1080

GROUND
Flat ground. Text-only cards.


**Ground / Photo**
Square 1080 × 1080



**Ground / Framed**
Square 1080 × 1080



**Ground / Split**
Square 1080 × 1080



Split. A hard stop, never a fade.

**Ground / Panel**
Square 1080 × 1080

Panel. Surface inside the keyline.

**Gesture / Hairline**
Square 1080 × 1080

Hairline: one, horizontal, gold.

**Gesture / Keyline**
Square 1080 × 1080

Keyline: 48px in, 2px, square corners.

**Gesture / Ring**
Square 1080 × 1080

12

GROUNDS AND GESTURES

**NEVER DRAWN**

Arches, tracery, rose windows, crosses, spires, stained glass, filigree, flourishes, banners, scrolls, drips, skulls, flash sheets, needles or machines. The only cathedral on any canvas is the one in the supplied logo file.

**Component / Type and call to action**
Portrait feed 1080 × 1350

EYEBROW
HEADLINE
**Subhead, one statement or question.**
Body. The smallest running text: 36px on a 1080 canvas.
Credit and source: 30px.

CALL TO ACTION
See the work
Call or text (225) 301-9527

**Component / Footer and page number**
Portrait feed 1080 × 1350

FOOTER
Compact
Call or text (225) 301-9527

Standard
Call or text (225) 301-9527 · Denham Springs

Expanded
Call or text (225) 301-9527
1318 Florida Ave SW, Denham Springs, LA 70726
Mon to Thu 10am to 6pm · Fri and Sat 10am to 7pm · Sun closed

Call or text (225) 301-9527 2 / 6 →

**Component / Credit, slot and markers**
Portrait feed 1080 × 1350

ARTIST CREDIT
[piece], [placement]. [artist].
Artist: Roger Cazares · Mikayla Paul (flagged) · Cleo [surname] (flagged)

Photo slot: Healed work · Process · Interior · Work by [artist]

CONFIRM BEFORE PUBLISHING
Sample data. Not a published figure.

**Component / Corner mark**
Square 1080 × 1080

CORNER MARK
The supplied cross at 72px, Ground only, margin equal to its height. Off by default.

SHARED SOCIAL COMPONENTS

Type roles, calls to action, footers, credit, slot, badges, corner mark.

# CAPTIONS AND HASHTAGS

- One piece or one fact, and one next step. One to three sentences on Instagram and Facebook; two to four on Google.
- Work captions open with the credit and tag the artist once: "Black and grey wolf pack, half sleeve. By Roger Cazares, @rc_tattoos. Walk in, or book ahead. Call or text (225) 301-9527."
- Hashtags never in artwork, never on Google. After the caption, five at most: #CathedralTattooStudio, two of #DenhamSprings #DenhamSpringsTattoo #BatonRougeTattoo, and up to two style tags that match the piece. CONFIRM BEFORE PUBLISHING

- Bio line for every studio profile: "Custom tattoo work in Denham Springs. Walk in, or book ahead. Call or text (225) 301-9527"
- Nothing is built for @rc_tattoos. It is Roger's own account, and the studio feed is never a mirror of it.

## SWITCHING THIS ARCHITECTURE TO ANOTHER CLIENT

1. Replace the colour, type, spacing and radius tokens. 2. Replace the Logos and Approved assets and the logo, avatar and footer paths. 3. Re-derive the --social-* and --data-* aliases. 4. Replace or remove the client-specific parts: the artist credit, the calendar, the review source lock, the logo floors, the claims register. 5. Keep the canvases, type roles, chart frame definition and family architecture. 6. Review every composition against the new brand. Recolouring this client's posts does not make another client's system.

SECTION 10

# DECK & WEBSITE TEMPLATES

Six 16:9 slide masters and the website, desktop and mobile, composed from the components with real content.

## SLIDE MASTERS, 1920 × 1080 AT 16:9

Custom tattoo work in Denham Springs. Walk in, or book ahead.

E1 · TITLE

SECTION 02

### THE WORK

Black and grey, fine line and dotwork, lettering, color, cover-ups, and large-scale pieces.

Call or text (225) 301-9527 02

E2 · SECTION



LARGE SCALE

### PLANNED, NOT IMPROVISED

Large pieces get planned across sittings, so they get the time they need.

Black and grey wolf pack, half sleeve. Roger Cazares.

Call or text (225) 301-9527 03

E3 · FEATURE PIECE

"He took my ideas and brought them to life even better than I imagined."

Keely · Google review

Call or text (225) 301-9527 04

E4 · QUOTE, HER OWN WORDS

FIRST TIME

### FIRST TIME, OR NERVOUS ABOUT IT

Say so when you come in. We'll walk you through what happens before anything starts, and you can ask whatever you want.

Call or text (225) 301-9527 05

E5 · STATEMENT

HOURS

| | |
|---|---|
| Monday to Thursday | 10am to 6pm |
| Friday and Saturday | 10am to 7pm |
| Sunday | Closed |

Walk in, or book ahead.

1318 Florida Ave SW, Denham Springs, LA 70726 · Call or text (225) 301-9527


E6 · HOURS AND CLOSE

THE DECK CARRIES THE SAME RULES


Ground #0A0A0A on every slide. The lockup on the title and the closing slide only. One photograph per slide, never behind text. Cinzel for the headline only. A credit under every piece. Every slide is dark; there is no light master.

# WEBSITE KIT

No domain is registered, so the site is a design only and no URL appears. On the home page the header carries no mark, because the lockup is in the hero directly beneath it; inner pages carry the cross at 40px.

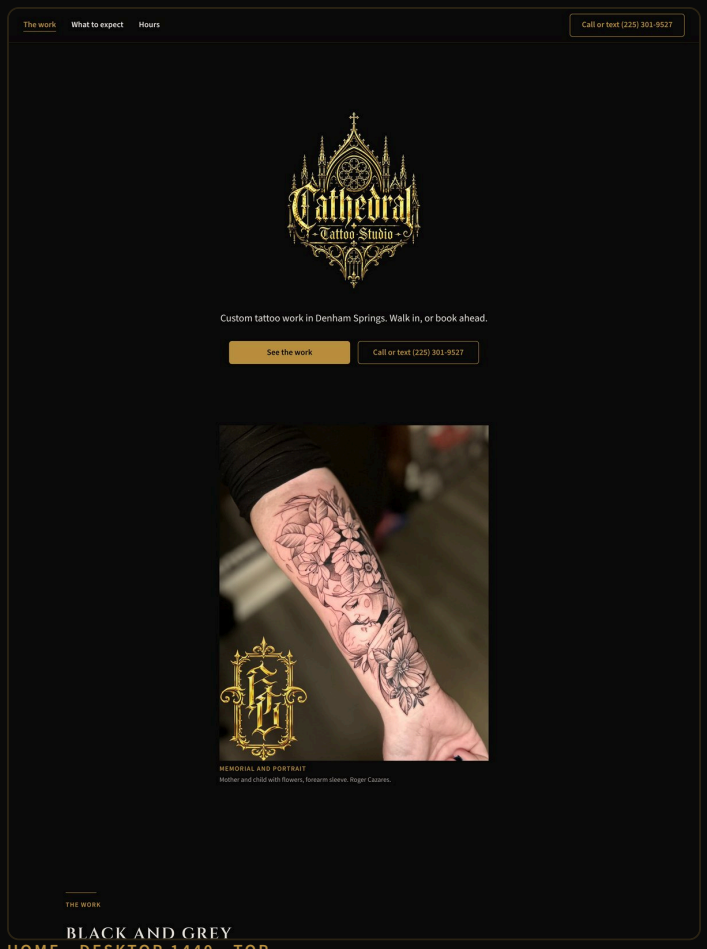


HOME · DESKTOP 1440 · TOP

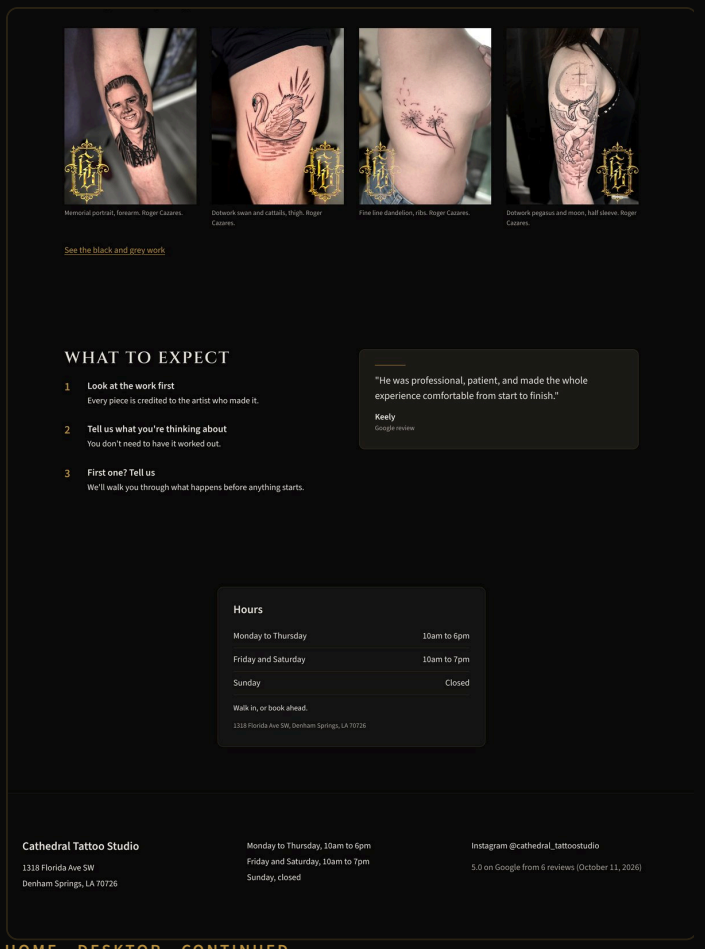


HOME · DESKTOP · CONTINUED


Call or text

Cathedral Tattoo Studio

Custom tattoo work in Denham Springs. Walk in, or book ahead.

See the work

Call or text



See the work

Call or text



MEMORIAL AND PORTRAIT

Mother and child with flowers, forearm sleeve. Roger Cazares.

THE WORK


## BLACK AND GREY




Memorial portrait, forearm. Roger Cazares.



Dotwork swan and cattails, thigh. Roger Cazares.

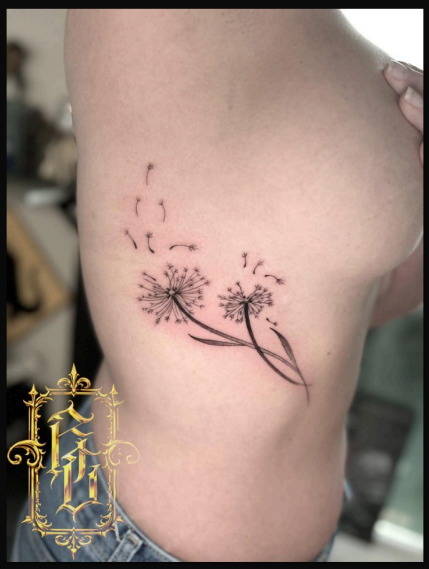

Fine line dandelion, ribs. Roger Cazares.

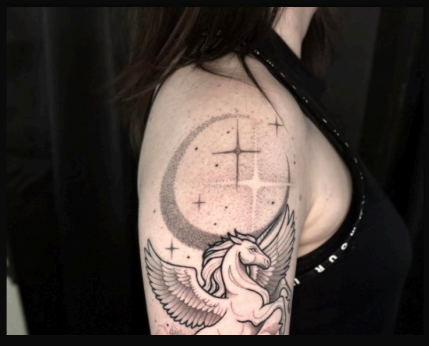

See the black and grey work

## WHAT TO EXPECT

1 **Look at the work first**
Every piece is credited to the artist who made it.

2 **Tell us what you're thinking about**
You don't need to have it worked out.

3 **First one? Tell us**
We'll walk you through what happens before anything starts.

"He was professional, patient, and made the whole experience comfortable from start to finish."

**Keely**
Google review

### Hours

| | |
|---|---|
| Monday to Thursday | 10am to 6pm |
| Friday and Saturday | 10am to 7pm |
| Sunday | Closed |

Walk in, or book ahead.

1318 Florida Ave SW, Denham Springs, LA 70726

### Cathedral Tattoo Studio

1318 Florida Ave SW
Denham Springs, LA 70726

Monday to Thursday, 10am to 6pm
Friday and Saturday, 10am to 7pm



HOME · MOBILE 390 · 1 OF 3



Dotwork pegasus and moon, half sleeve. Roger Cazares.

See the black and grey work

HOME · MOBILE 390 · 2 OF 3

Sunday, closed

Instagram @cathedral_tattoostudio

5.0 on Google from 6 reviews (October 11, 2026)

HOME · MOBILE 390 · 3 OF 3

Under 640px the mobile action bar pins "See the work" and "Call or text" to the bottom of the screen at equal width.

SECTION 11

# TOKEN SOURCE

Reproduced verbatim, so this document can rebuild the system if every other file is lost.

## TOKENS/CSS-TOKENS.CSS

The values of record, from design-kit/tokens/css-tokens.css at commit 9715d78. Where any other document disagrees with a value, this file wins.

```
/* Cathedral Tattoo Studio: design tokens
 * Generated 2026-09-04 by BlakSheep Creative.
 * INTERIM PALETTE. Sampled from the 1242px logo raster
 *    (01-Brand-Assets/cathedral-tattoo-studio-logo.webp) because no vector
 *    exists. The mark uses a metallic gradient, so these are gradient stops
 *    read off a JPEG, not authored brand colours.
 * Keep identical to DESIGN.md and brand/guidelines.md.
 * Prefix for content-engine output: cts-
 */

:root {
  /* Brand: gold on black. Black is the field, gold is the accent. */
  --cts-gold-bright:   #EBC853;  /* 12.18:1 on ground, AA        */
  --cts-primary:       #B99040;  /*  6.72:1 on ground, AA        */
  --cts-gold-deep:     #825F2C;  /*  3.42:1 on ground, AA large  */

  /* Surfaces */
  --cts-bg-base:       #0A0A0A;
  --cts-bg-surface:    #141414;
  --cts-bg-elevated:   #1E1C19;

  /* Text */
  --cts-text-primary:  #E8E4DC;  /* 15.61:1 */
  --cts-text-muted:    #A9A29A;  /*  7.85:1 */
  --cts-border-subtle: rgba(185, 144, 64, 0.18);

  /* Status */
  --cts-success: #22A06B;
  --cts-warning: #E8A33D;
  --cts-error:   #D9534F;

  /* Typography: agency recommendations, unconfirmed */
  /* The blackletter in the logo is unidentified and exists only inside the logo
     image. It is never set as live type, so there is no display font token. */
  --cts-font-heading: "Cinzel", Georgia, serif;             /* H1, H2 only */
  --cts-font-body:    "Source Sans 3", system-ui, sans-serif; /* H3, body, UI */
  --cts-text-display: clamp(2.5rem, 5vw, 3.5rem);
  --cts-text-h1: clamp(2rem, 4vw, 2.75rem);
  --cts-text-h2: clamp(1.625rem, 3vw, 2.125rem);
  --cts-text-h3: 1.5rem;
  --cts-text-base: 1.125rem;
  --cts-text-small: 0.875rem;
  --cts-leading-body: 1.6;
  --cts-leading-heading: 1.15;

  /* Spacing */
  --cts-space-1: 8px;
  --cts-space-2: 16px;
  --cts-space-3: 32px;
  --cts-space-4: 64px;
```

```
  --cts-space-5: 96px;
  --cts-space-6: 128px;

  /* Radius + layout */
  --cts-radius-sm: 6px;
  --cts-radius-md: 12px;
  --cts-radius-lg: 20px;
  --cts-container: 1200px;
}

/* Never set gold text on white: #B99040 on #FFFFFF is 2.95:1 and fails AA.
   Solid-gold button with a black label is 6.72:1 and passes. */
.cts-btn-primary {
  background: var(--cts-primary);
  color: var(--cts-bg-base);
  border-radius: var(--cts-radius-sm);
  min-height: 44px;
}
.cts-btn-secondary {
  background: transparent;
  color: var(--cts-primary);
  border: 1px solid var(--cts-primary);
  border-radius: var(--cts-radius-sm);
  min-height: 44px;
}
```

## THE SOCIAL LAYER

```
/* components/bundle.css: aliases only. No raw colour, no font. */
:root {
  --social-ground: var(--cts-bg-base);
  --social-panel: var(--cts-bg-surface);
  --social-panel-raised: var(--cts-bg-elevated);
  --social-headline-color: var(--cts-text-primary);
  --social-caption-color: var(--cts-text-muted);
  --social-hairline: var(--cts-primary);
  --social-keyline: var(--cts-border-subtle);
  --social-label-color: var(--cts-primary);
  --data-1: var(--cts-text-primary);
  --data-2: var(--cts-primary);
  --data-3: var(--cts-text-muted);
  --data-highlight: var(--cts-gold-bright);
  --data-track: var(--cts-bg-surface);
}

/* tokens.json: formats and safe zones (compiled to :root) */
--format-portrait-w: 1080px;   --format-portrait-h: 1350px;
--format-square-w: 1080px;     --format-square-h: 1080px;
--format-story-w: 1080px;      --format-story-h: 1920px;
--format-google-w: 1200px;     --format-google-h: 900px;
--format-link-w: 1200px;       --format-link-h: 630px;
--format-widescreen-w: 1920px; --format-widescreen-h: 1080px;
--format-fbcover-w: 1640px;    --format-fbcover-h: 924px;
--format-gbpcover-w: 1080px;   --format-gbpcover-h: 608px;
--format-tall-w: 1000px;       --format-tall-h: 1500px;
--format-banner-w: 1500px;     --format-banner-h: 500px;
--format-thumb-w: 1280px;      --format-thumb-h: 720px;
--format-avatar-w: 1080px;     --format-avatar-h: 1080px;
--social-pad: 96px;
--safe-story-top: 250px;       --safe-story-bottom: 340px;
--safe-landscape-margin: 64px; --safe-fbcover-y: 150px;
--safe-avatar: 70%;
```

# MOTION AND FOCUS

```
/* No motion for its own sake. Nothing bounces, slides or counts. */
--duration: 150ms to 200ms;  --easing: ease-out;
:focus-visible { outline: 3px solid var(--cts-gold-bright); outline-offset: 2px; }
@media (prefers-reduced-motion: reduce) { * { transition: none !important; } }
```

SECTION 12

# FILE INDEX

Where everything lives.

## THE REPOSITORY: CLINTSANCHEZ/CATHEDRAL-TATTOO-STUDIO

| PATH | WHAT IT IS |
|---|---|
| **design-kit/0 - READ ME FIRST.md** | Status, brand facts, run order, priority order, open decisions |
| **design-kit/1 - MASTER PROMPT.md** | The prompt for the master brand design kit |
| **design-kit/2 to 6** | Brand guidelines, visual identity, voice, messaging, brand context and the claims lists |
| **design-kit/7 - SOCIAL TEMPLATE SYSTEM PROMPT.md** | The social template system brief |
| **design-kit/8 - Asset Manifest and Production Rules.md** | What exists, what is missing, image rules, quality checklist |
| **design-kit/assets/logos/** | The derived logo set, source rasters, the RC mark (reference only) |
| **design-kit/assets/photos/** | The 29 approved photographs and PHOTO-MANIFEST.md |
| **design-kit/tokens/css-tokens.css** | The token values of record |
| **design-kit/exports/social-templates/** | 99 ready-to-post PNGs, captions and alt text (pull request #1) |
| **99-Reference/** | Third-party and personal images. Never published |

## THE DESIGN SYSTEM: CATHEDRAL TATTOO STUDIO

| PATH | WHAT IT IS |
|---|---|
| **project/README.md** | The brand book: content fundamentals, visual foundations, logos, photography, components |
| **project/social.md · platforms.md** | Social templates and Platform specifications sections |
| **project/tokens.json** | Colours, type (with the social scale), spacing, radius, leading, layout, format and safe tokens |
| **project/components/bundle.css** | The component and social stylesheet, cts- and sc- classes |
| **project/components/<Name>/** | 17 components and 21 social plates, each with a preview and a guideline card |
| **Asset groups** | Logos (20) · Photos (102, the page archive) · Approved (29, for marketing) |

## THE 38 GUIDELINE SPECIMEN CARDS

Button · Piece · FeaturePiece · PieceSet · ArtistCard · ReviewQuote · HoursBlock · WhatToExpect · FAQ · OpenDates · NeutralNotice · ContactForm · Header · Footer · MobileActionBar · PhotoSlot · ConfirmBadge · Cover · SocialFormats · SocialDecoration · SocialKit · SocialAvatars · SocialFinishedPiece · SocialHealed ·

SocialProcess · SocialOpenDates · SocialWalkIn · SocialReview · SocialRating · SocialHours · SocialFirstTime · SocialPortraitChecklist · SocialCoverUp · SocialAftercare · SocialFAQ · SocialMeetArtist · SocialCarousel · SocialVideoCovers · SocialBanners

SECTION 13

# OPEN QUESTIONS

Ask before finalizing anything. None has been answered by the studio.

| # | QUESTION | WHY IT BLOCKS |
|---|---|---|
| **B-05** | Premium, held or released | The shop takes walk-ins six days a week with no minimum. Decides headlines, how sparse layouts are, and whether walk-ins are ever more than a plain line. Clint |
| **R-18 · R-19** | The position and the tagline "Work worth carrying" | Shown as drafts near the logo on covers, heroes and social cards |
| **R-03** | How each person's role may be described | "Tattoo artist at Cathedral Tattoo Studio" for everyone until then |
| **R-09** | The roster: Cleo's surname, each handle, any apprentice, consent to be named | Artist cards, credit lines, meet-the-artist posts and two review quotes |
| **R-33** | Photographs of work by Mikayla and Cleo, and a portrait of each | Every slot labelled "Work by" |
| **R-32** | Whether the announced move is still happening | One address and no mention of a move until then |
| **R-11** | A domain and a website address | No URL anywhere: footers, link fields, the business card |
| **R-04** | Facility permit and artist registration numbers | No licence, hygiene or safety claim until then |
| **R-30** | Whether the studio will set a minimum or take deposits | No price wording of any kind |
| **R-20** | Whether copy is written by an artist in the first person or by the shop | Shop pages neutral, "we" sparingly |
| **R-27** | Who made the logo and whether rights were transferred | Nothing printed at scale |
| **B-04** | The blackletter typeface in the logo | It appears only inside the logo image |
| — | Final colour values | The present ones are sampled from a JPEG gradient. A vector or ink reference would replace them once |
| — | Aftercare steps, sitting counts, cover-up rules of thumb | Every step and figure from the artist before the aftercare family ships |
| — | Open dates, healed and process photographs, a cleared photo of Roger at work, an interior photo | The photo slots and the calendar fill from these |
| — | TikTok: whether an account exists, and its handle | Every TikTok row stays unverified |
| — | The hashtag set and the icon set | Both proposed, neither chosen |

**THREE OF THESE ARE ALREADY BAKED INTO DOZENS OF GRAPHICS**

The rating date (re-read and re-date before every use), the tagline (drafted near the logo on covers), and the names Mikayla Paul and Cleo (held in flagged slots). Answer them first, then re-export.

END OF DOCUMENT

CATHEDRAL TATTOO STUDIO · COMPREHENSIVE BRAND KIT · EDITION 0.1

# NO FLUFF.
# NO JARGON.
# JUST RESULTS.

Brand system built, documented and maintained by BlakSheep Creative, Denham Springs, Louisiana. Web design, digital marketing, branding and AI automation for local and regional business.

**PREPARED BY**
BlakSheep Creative
Denham Springs, LA
info@blaksheepcreative.com

**FOR**
Cathedral Tattoo Studio
1318 Florida Ave SW, Denham Springs, LA 70726
Call or text (225) 301-9527